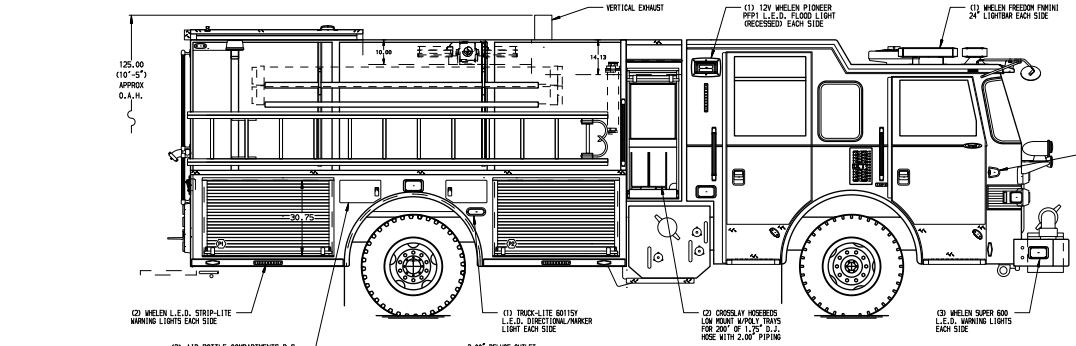

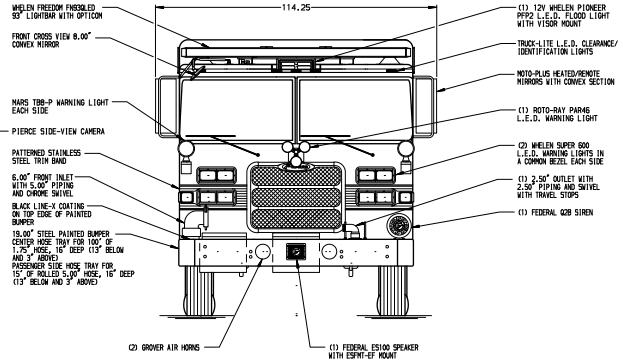

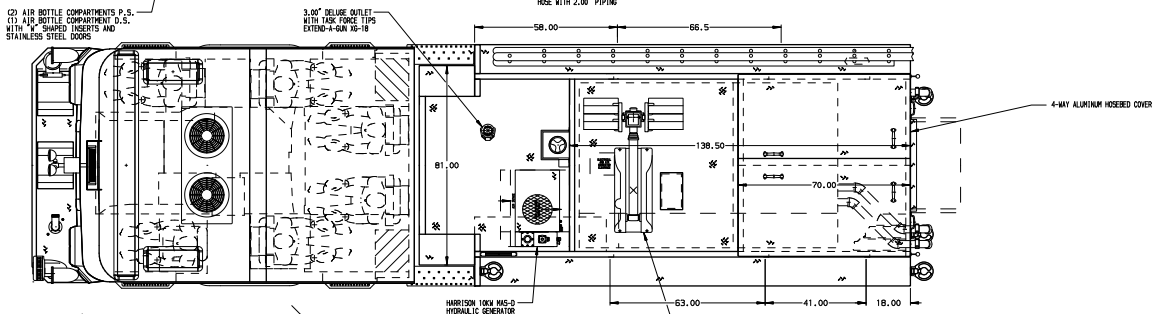

HOSEBED CAPACITIES
① 200' OF 2.00" D.J. HOSE
② 400' OF 3.00" D.J. HOSE
③ 1500' OF 5.00" D.J. HOSE
④ 300' OF 1.75" D.J. HOSE

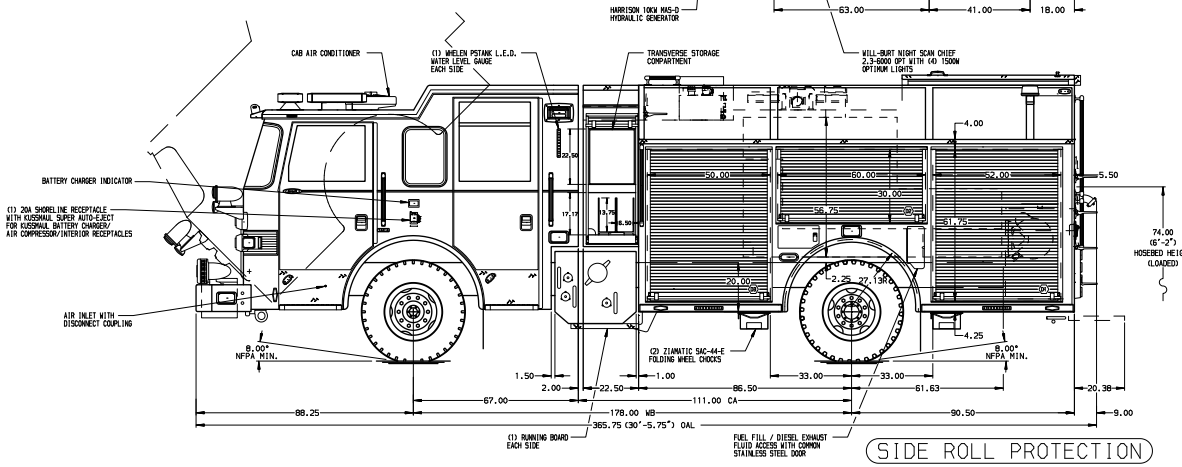

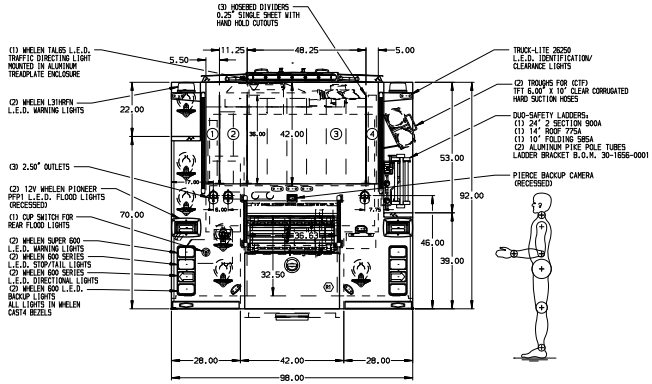

ALUMINUM BODY | MAXIMUM O.A.L. 366.00" | MAXIMUM O.A.H. 126.00" | FRONTAL IMPACT PROTECTION | SIDE ROLL PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. PUMP PANEL DRAWING REQUIRED
2. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
3. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
4. KUSSMAUL PUMP PLUS 1200 BATTERY CHARGER/AIR COMPRESSOR LOCATED BEHIND PASSENGER'S SEAT
5. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
6. ARROW L.E.D. LIGHT STRIPS LOCATED IN HOSE BED AREA
7. S/STL SCUFFPLATE ON REAR OUTER CORNER OF BODY
8. PIERCE L.E.D. COMPARTMENT DUAL LIGHT STRIPS LOCATED PER SHOP ORDER
9. ONE PAINTED ADJUSTABLE FULL WIDTH/FULL DEPTH SHELF IN COMPARTMENTS P1 & P2; TWO IN D1 & D3
10. ONE PAINTED SWING-OUT ALUMINUM PES BOARD TOOL BOARD IN COMPARTMENT D2
11. ALL FOLDING STEPS TO BE TRIDENT WITH INTEGRATED L.E.D. LIGHT UNLESS SPECIFIED
12. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
13. STAINLESS STEEL FENDER CROWNS FRONT AND REAR
14. PIERCE LOGO NOSEPLATE FRONT AND REAR
15. LINE-X COATING ON GAUGE AND OPERATOR'S PANEL
16. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL T618-17-18 LOCATED IN R1 WITH 200' OF 10/3 CABLE, ACRON JUNCTION BOX, AND ALUMINUM JUNCTION BOX HOLDER
18. ONE 20A, 120V DUPLEX RECEPTACLE BEHIND DRIVER'S SEAT AND IN D5 EMS CABINET

CUSTOMER APPROVAL
APPROVED BY:_____
DATE:_____

Pierce MANUFACTURING INC.

REV	DATE	BY	CH	
				CHASSIS DATA
V	16DEC13	NPA	JBO	MAKE
V	24OCT13	NPA	JBO	PIERCE
V	25SEP13	NPA	CSH	MODEL
				AX6710

TITLE: 1500-D-1000 GAL POLY, 177" PUC PUMPER
(2) XLAYS, LADDERS ON SIDE, DELUGE, GENERATOR
FOR: PLEASANT HALL VOLUNTEER FIRE COMPANY
PLEASANT HALL, PENNSYLVANIA
DWG NO. 27214AD

JOB NO.	27214
SCALE	DATE
1:24	
DRAWN BY	20SEP13
NPA	
CHECKED BY	20SEP13
CSH	
SHEET SIZE	SHEET NO.
D	1 OF 1

View File Created 13-FEB-2014 14:22:00