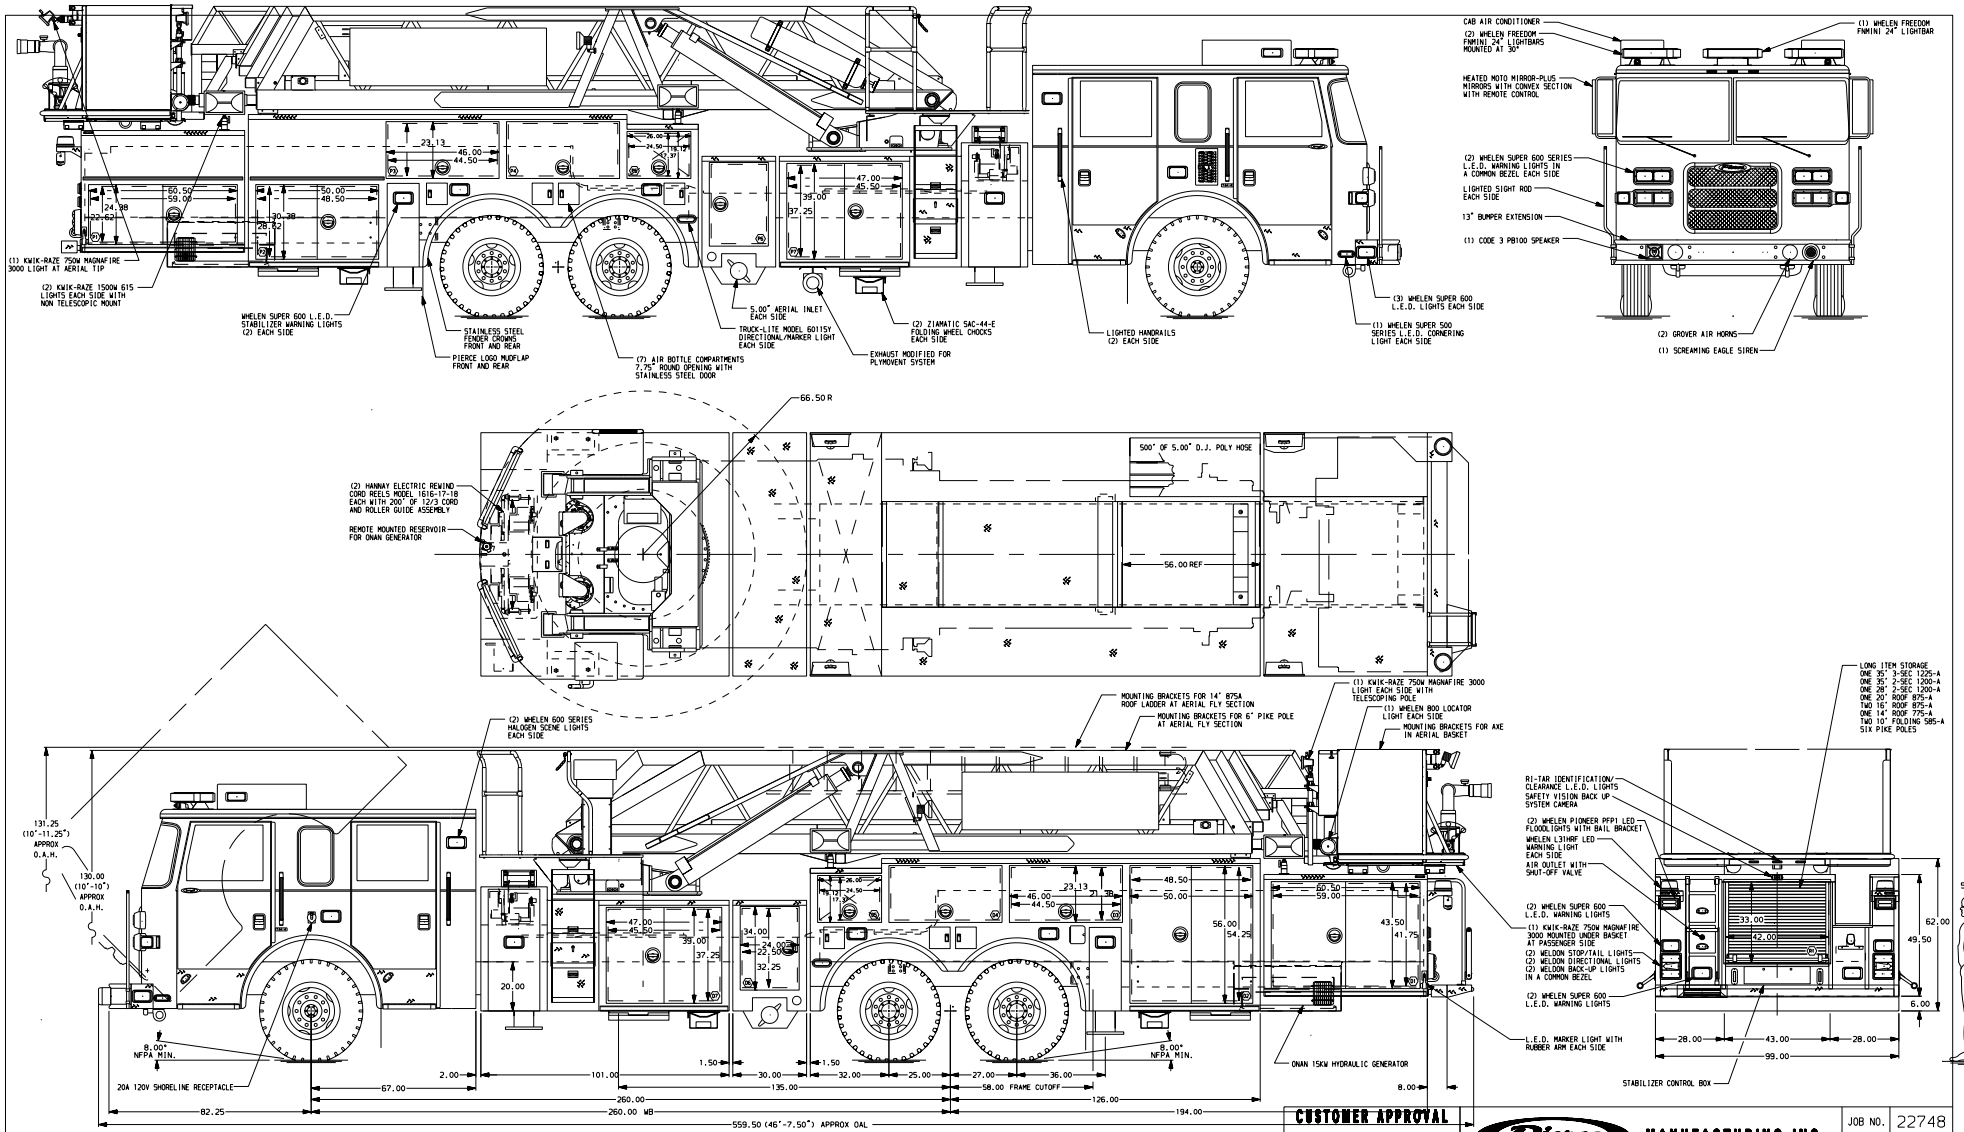

ALUMINUM BODY | TARGET O.A.L. 576" | TARGET O.A.H. 131.50" | SIDE ROLL PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
3. BATTERY CHARGER LOCATED IN CREW CAB SEAT RISER
4. S/STL SCUFFPLATE INTERIOR OF DOOR IN COMPARTMENT D1,D2,D3,D4,D5,D6,D7,P1,P2,P3,P4,P5,P6,P7
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT D1
6. TWO ADJUSTABLE SLIDE-OUT TOOL BOARDS WITH PAC TRAC IN COMPARTMENT D2
7. TURTLE TILE MATTING ON FLOOR IN COMPARTMENT D3,D4,D5,D6,D7,P1,P2,P3,P4,P5,P6,P7
8. TURTLE TILE MATTING ON SHELF/TRAY IN COMPARTMENT P7
9. ONE ADJUSTABLE SHELF (FULL DEPTH/FULL WIDTH) IN COMPARTMENT P7
10. CIRCUIT BREAKER PANEL IN COMPARTMENT D7
11. STAINLESS STEEL BATTERY TRAY
12. 120V POWER TO AERIAL TIP
13. 3-in-1 LYFECOMBO BRACKETS AT AERIAL BASKET
14. HOSE STORAGE BOX AT PLATFORM FOR 100' OF 1.75" HOSE
15. SHELF TRACKS LOCATED D1,D2,D3,D4,D5,P3,P4,P5,P7
16. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
17. BREATH AIR TO AERIAL TIP
18. BATTERY CHARGER INDICATOR LOCATED AT DRIVERS SEAT RISER
19. KUSSMAUL BATTERY SAVER LOCATED IN CREW CAB SEAT RISER
20. 2-WAY FIRE-COM PANTHERC INTERCOM SYSTEM
21. ONE VERTICAL PARTITION LOCATED IN COMPARTMENT P5
22. BATTERY "ON" INDICATOR
23. ON SCENE LED DUAL LIGHT STRIPS IN COMPARTMENT D1,D2,D3,D4,D5,D6,D7,P1,P2,P3,P4,P5,P6,P7,R1
24. THREE 20A 120V RECEPTACLES LOCATED IN CAB PER SHOP ORDER
25. AERIAL PEDESTAL RAISED 10"
26. ONE 17' LITTLE GIANT LADDER LOCATED IN COMPARTMENT P5

REV	DATE	BY	CH
1	15DEC09	JGA	THA
2	05OCT09	JGA	JBL

CUSTOMER APPROVAL
APPROVED BY:
DATE:

Pierce MANUFACTURING INC.

CHASSIS DATA	
MAKE	PIERCE
MODEL	AXT6700
TITLE	95' AERIAL MIDMOUNT AND BODY ASSEMBLY NO TANK-NO PUMP
FOR	GROVE CITY VOL. FIRE DEPT. GROVE CITY, PA
DWG NO.	22748AD
JOB NO.	22748
SCALE	1:24
DATE	
DRAWN BY	JGA 30SEP09
CHECKED BY	JBL 30SEP09
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 16-DEC-2009 07:31:43