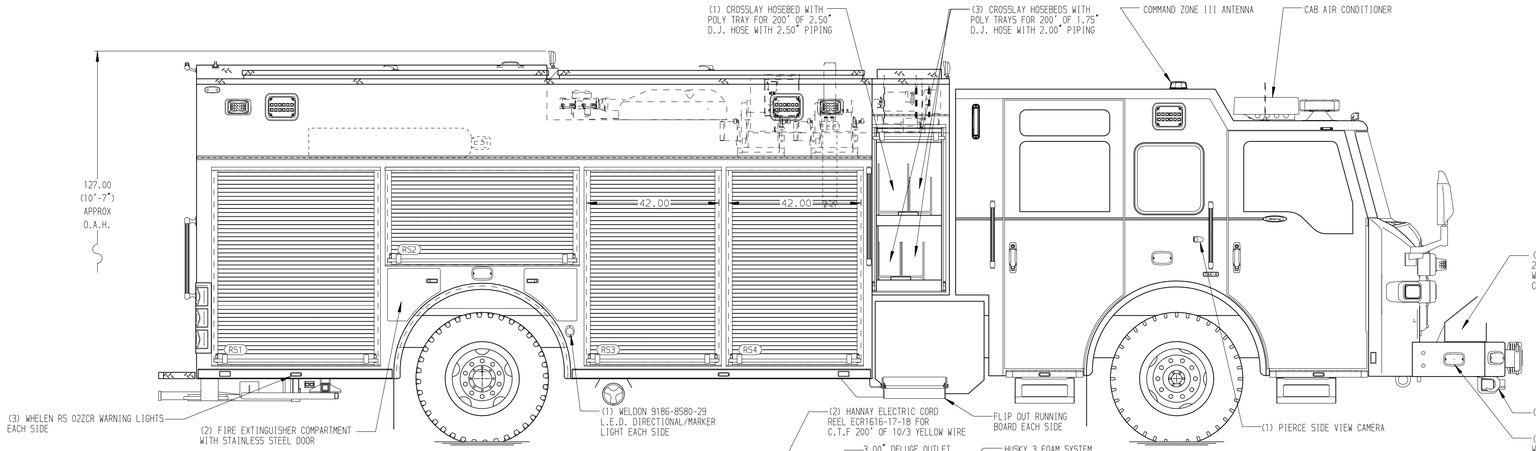

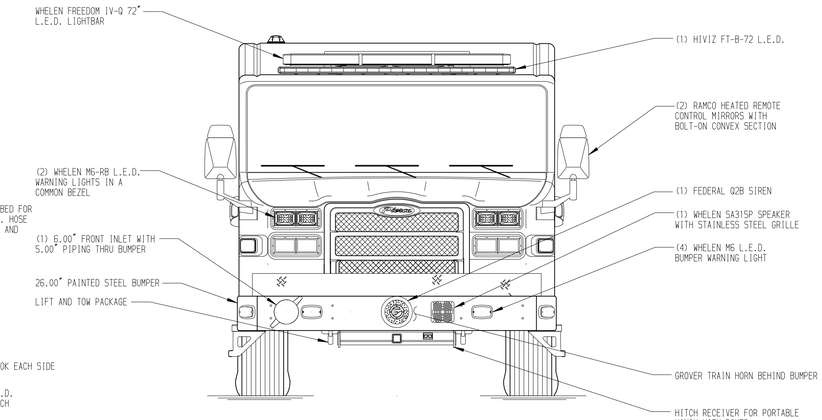

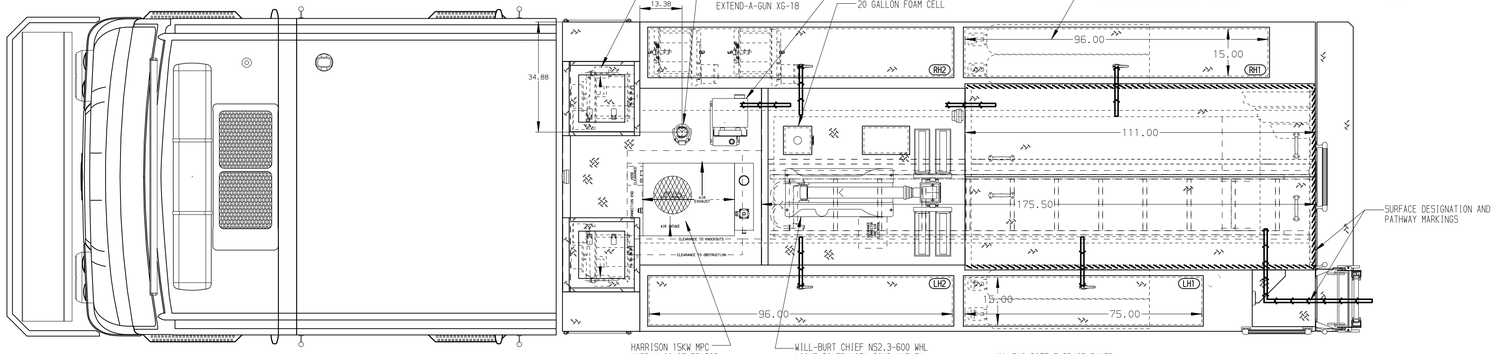

HOSEBED CAPACITIES
(1) 1400' OF 5.00" LDH HOSE
(2) 500' OF 3.00" D.J. POLY HOSE

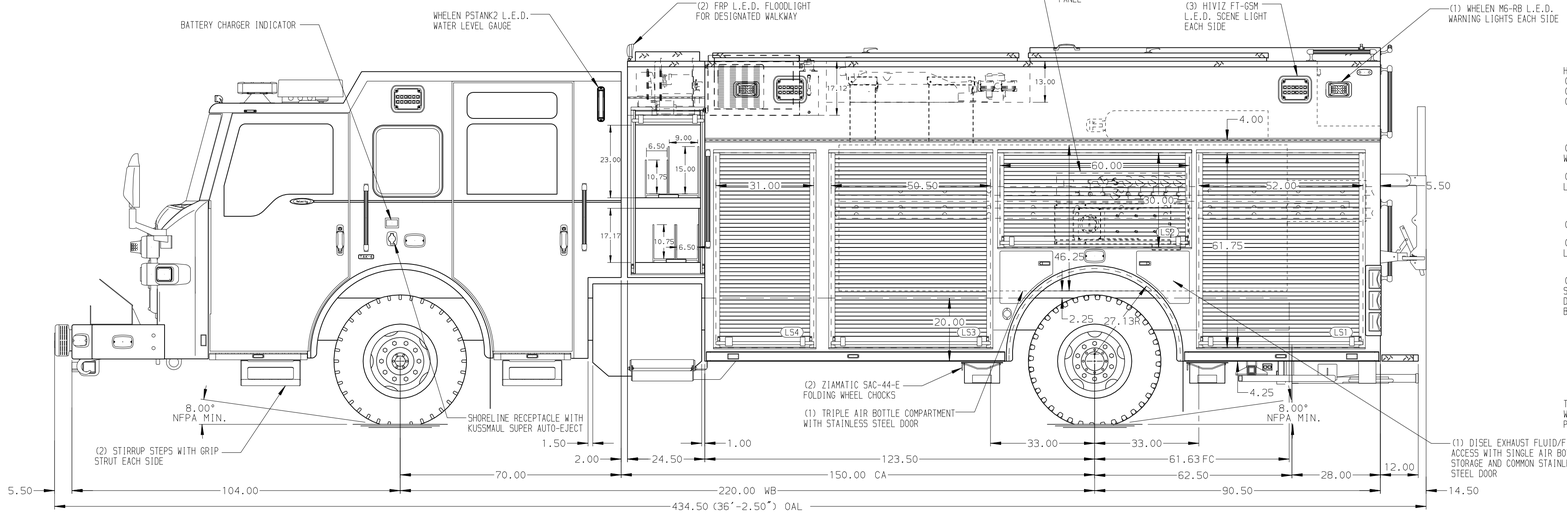

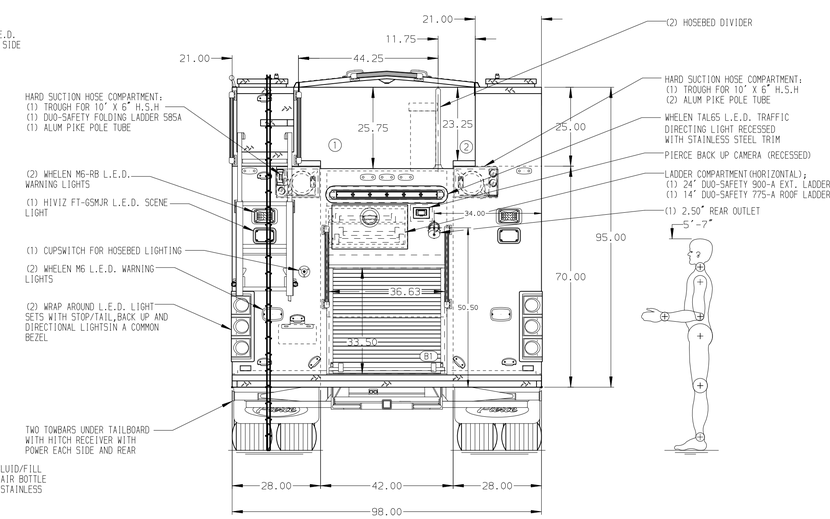

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR INLET WITH DISCONNECT COUPLING IN DRIVER SIDE STEP WELL
3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENTS; LS1,LS3,RS1 & RS3
6. ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENTS; LS1,LS3,RS1& RS3; TWO IN RS4
7. ONE ADJUSTABLE TILT/SLIDE-OUT FULL WIDTH/DEPTH TRAY IN COMPARTMENT RS1 & RS4
8. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS; LS1,LS3 & RS4
9. ONE SWING-OUT ALUMINUM TOOL BOARD IN COMPARTMENT RS2
10. TWO SLIDE-OUT TOOLBOARD WITH PEGBOARD PATTERN AND PAINTED FINISH IN COMPARTMENT LS3 & RS3
11. ONE VERTICAL PARTITION IN COMPARTMENTS LS3 & RS3
12. ONE CTECH (3) DRAWER ASSEMBLY IN COMPARTMENT RS1
13. REINFORCED FLOORING IN COMPARTMENT LS2
14. STORAGE RACK FOR (4) AIR BOTTLES LOCATED IN COMPARTMENT LS2
15. CIRCUIT BREAKER PANEL IN COMPARTMENT LS3
16. MOUNTING PROVISIONS FOR FUTURE HYDRAULIC REEL INSTALLATION LOCATED IN HATCH COMPARTMENT RH2

REV	DATE	BY	CH
V	16APR21	JRC	-
V	28JAN21	CDU	PHA

CHASSIS DATA
MAKE: PIERCE
MODEL: VELOCITY FR

Pierce MANUFACTURING INC.

TITLE: 1500-D-750P, 730 GAL OF WATER W/ 20 GAL FOAM CELL 214" PUC RESCUE, LADDERS IN HOSE BED, (3) X-LAYS
FOR: LOGAN TOWNSHIP GREENWOOD FIRE COMPANY ALTOONA, PENNSYLVANIA
DWG NO.: 35887AD

JOB NO.	35887
SCALE	1:24
DATE	
DRAWN BY	JRC
DATE	21JAN21
CHECKED BY	CDU
DATE	26JAN21
SHEET SIZE	D
SHEET NO.	1 OF 1