
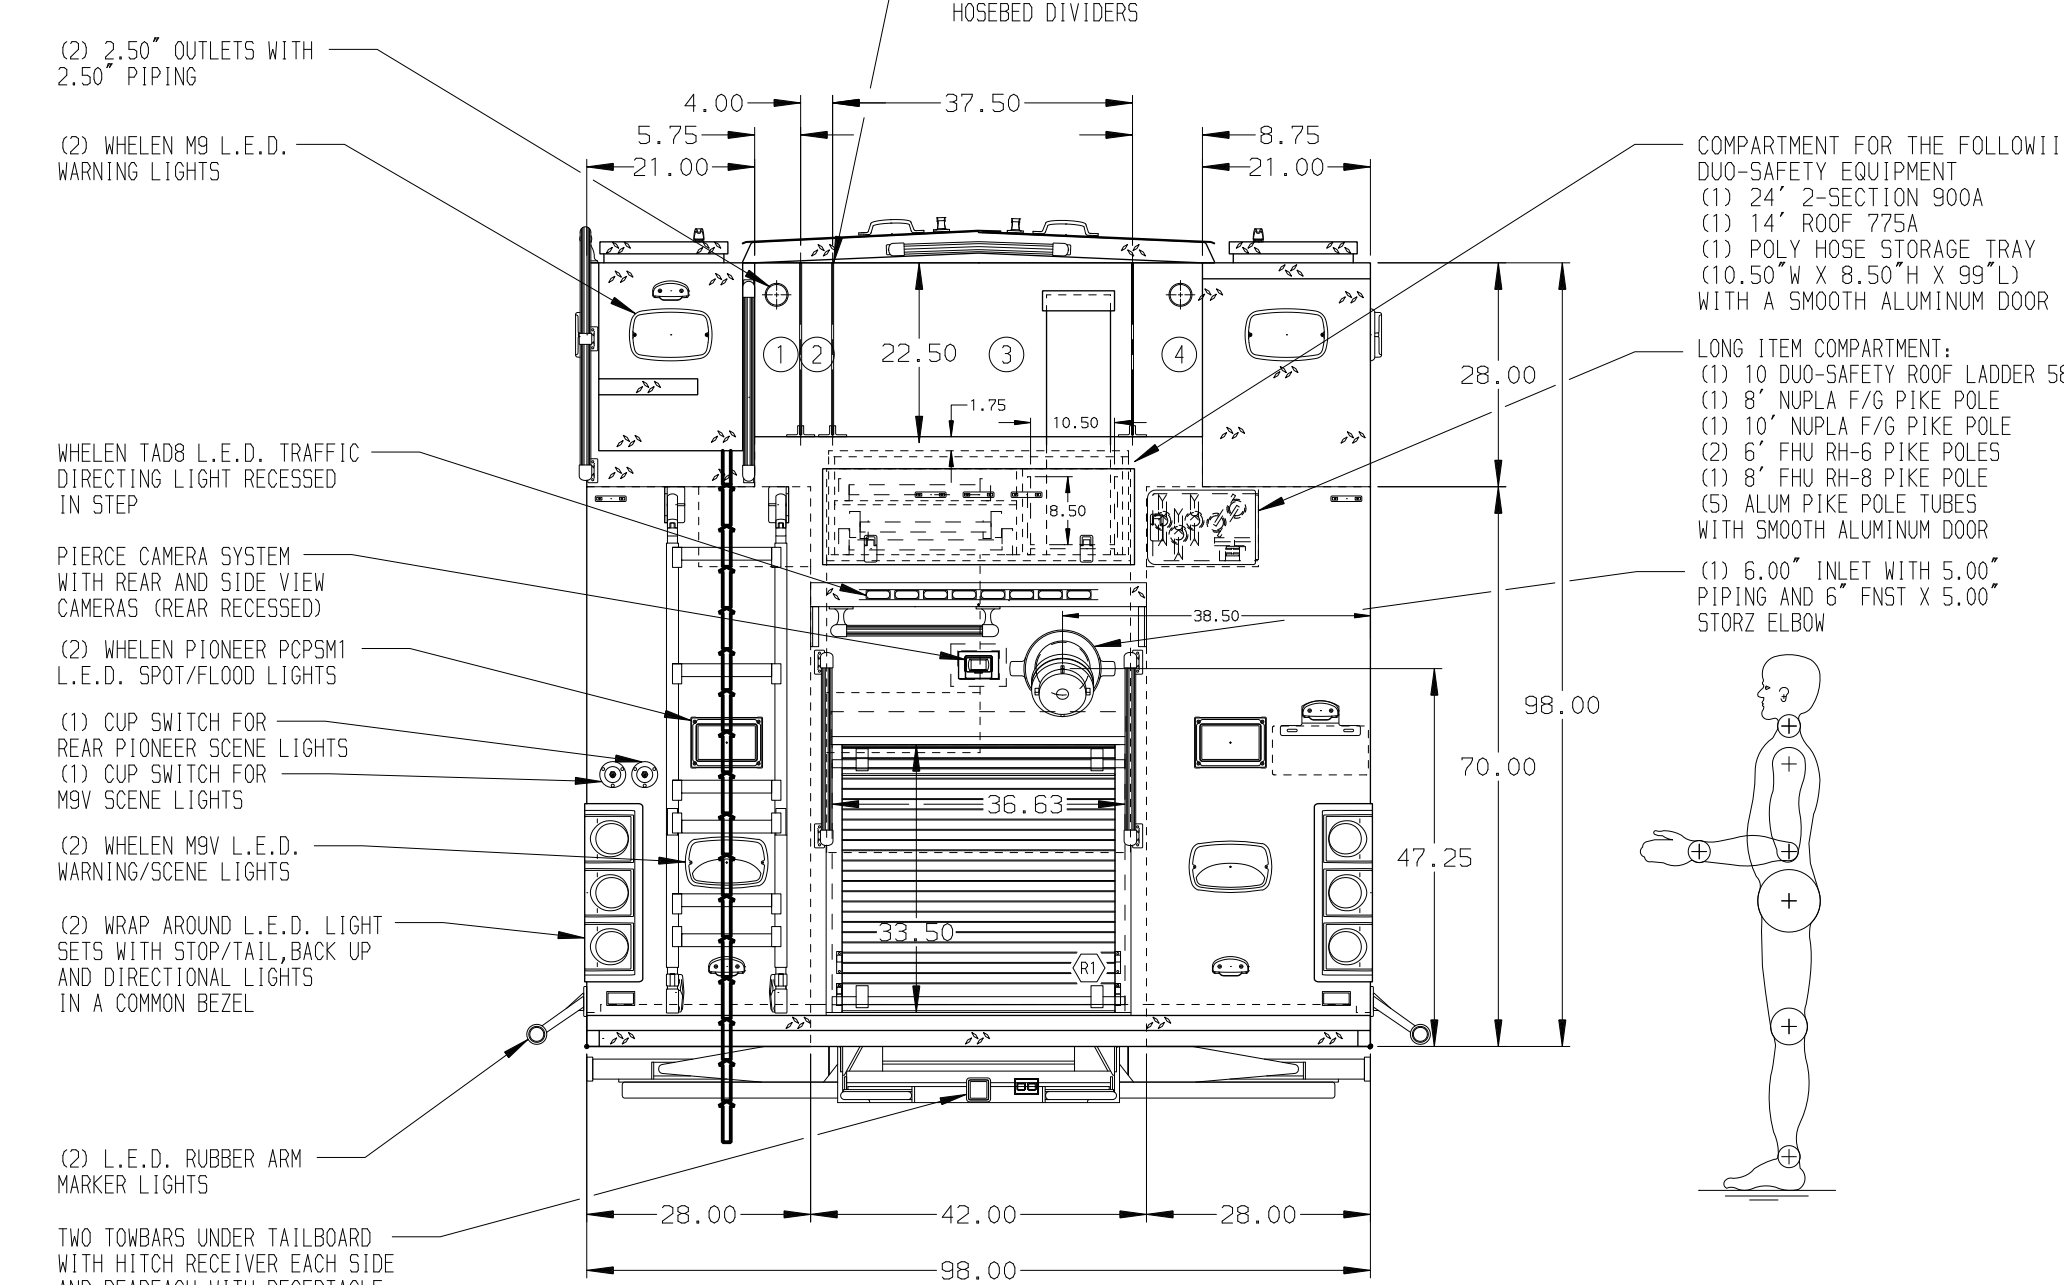


HOSEBED CAPACITIES

1	250' OF 2.50" D.J. HOSE
2	200' OF 1.50" D.J. HOSE
3	1200' OF 5.00" D.J. HOSE
4	250' OF 2.50" D.J. HOSE WITH BLITZ STEP GUN

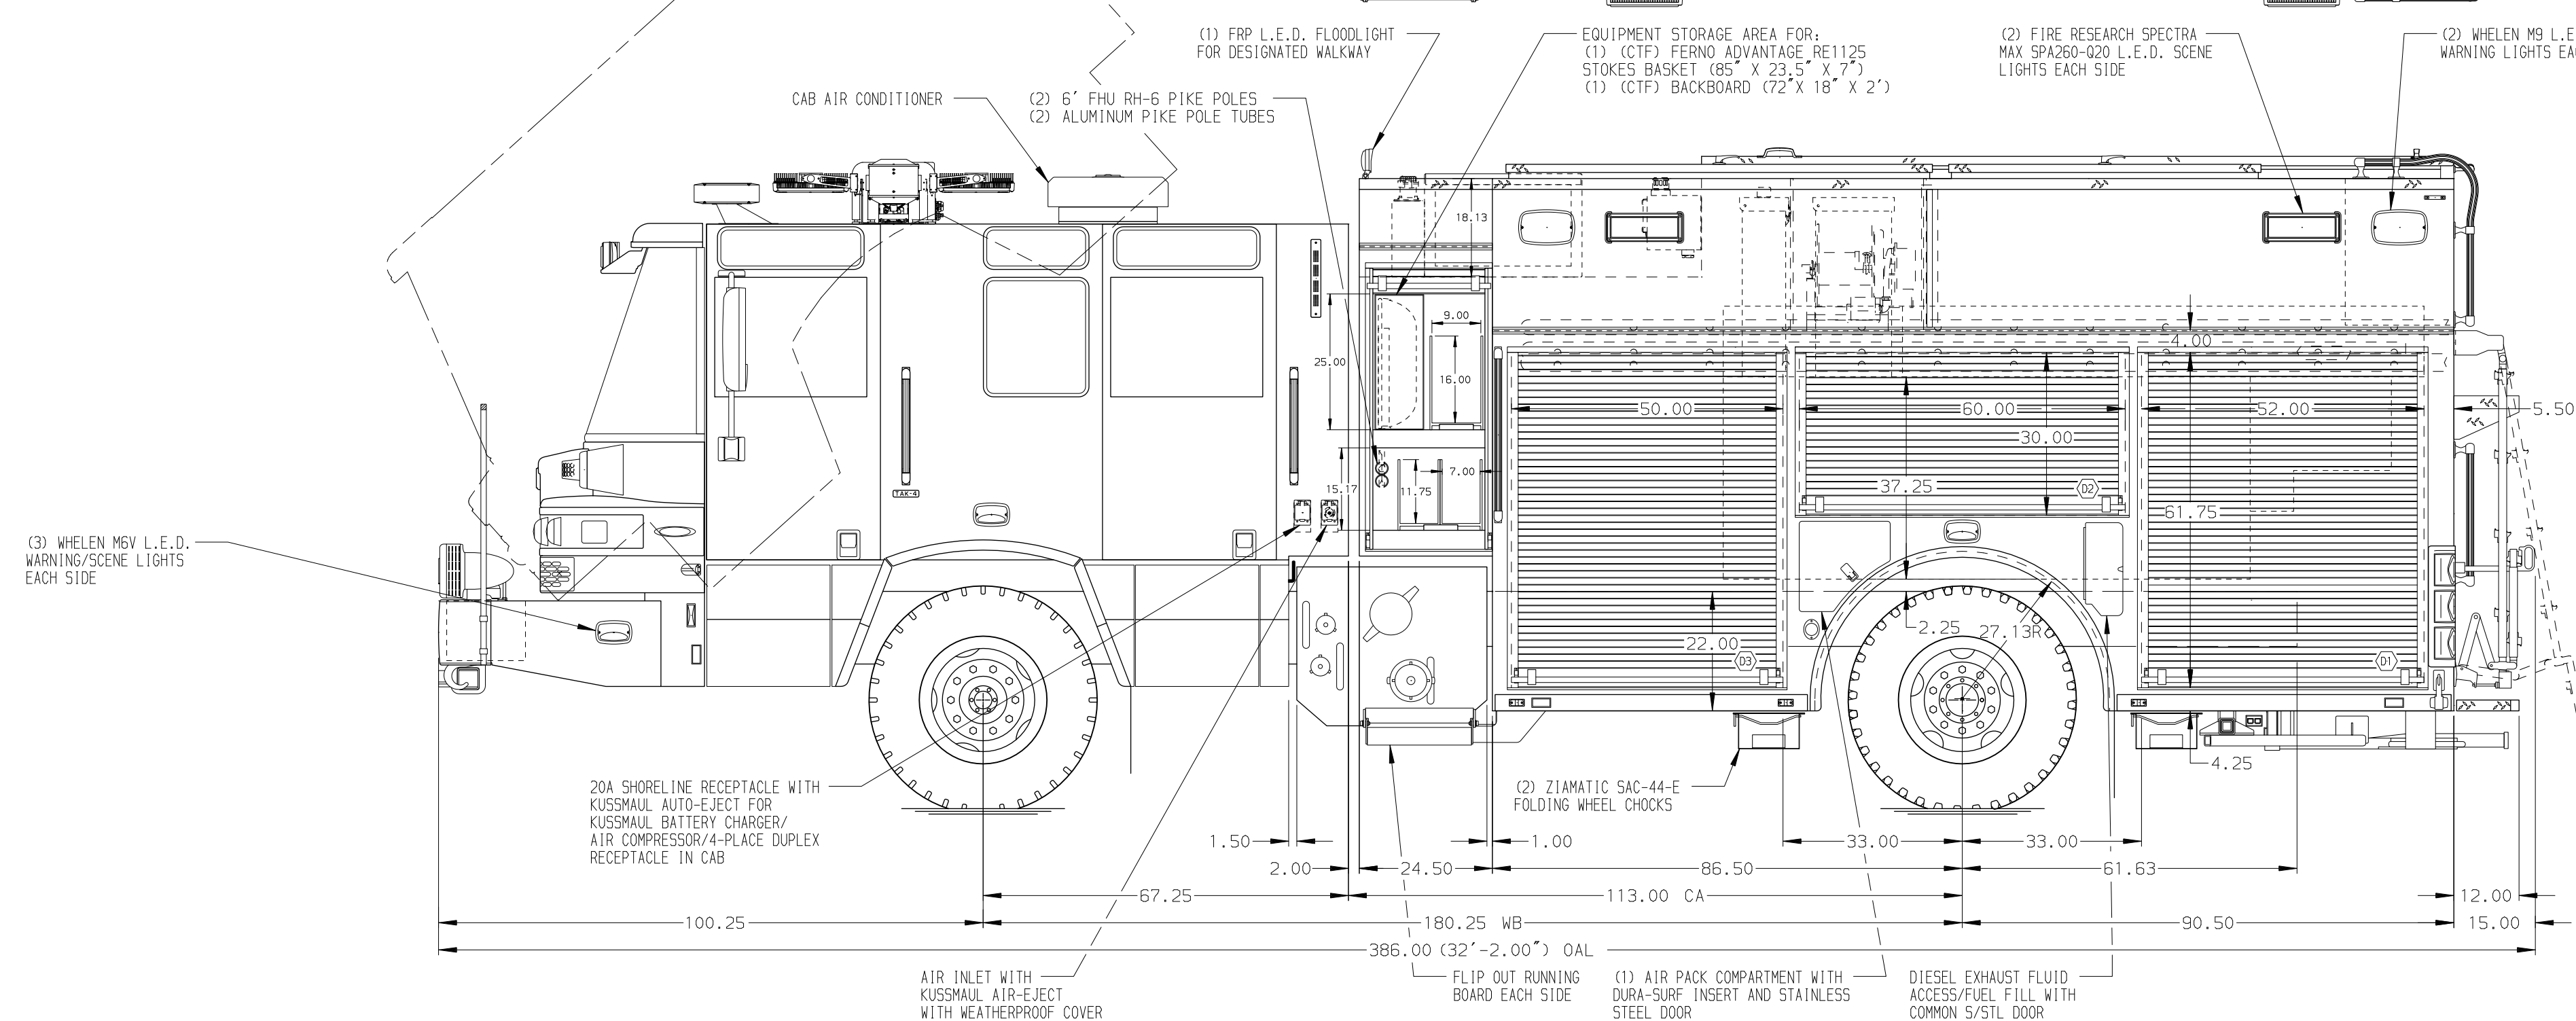

ALUMINUM BODY MAXIMUM O.A.L. 396" MAXIMUM O.A.H. 128" SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. ONE 3000W WARN PORTABLE RECEIVER TYPE WINCH
3. ALUMINUM 4-WAY ON CAB ROOF
4. KUSSMAUL 1200 BATTERY CHARGER BEHIND DRIVER'S SEAT
5. BATTERY CHARGER INDICATOR LOCATED ON D.S. SEAT RISER
6. ON SCENE SOLUTIONS 12V L.E.D. LIGHT STRIPS MOUNTED ON THE HOSE BED COVER
7. FULL STRAP ON DOOR IN COMPARTMENTS D1, D2, D3, D4, P1, D2, P3 & P4
8. ONE PAINTED ADJUSTABLE FULL WIDTH/FULL DEPTH SHELF IN COMPARTMENT D1; TWO IN P1; THREE IN P3
9. ONE ADJUSTABLE SLIDE-OUT TRAY WITH UPPER SHELF AND PEG BOARD ON REAR AND RIGHT SIDE IN COMPARTMENT D3
10. ONE PAINTED ADJUSTABLE TILTING SLIDE-OUT TRAY WITH CABLE RELEASE IN COMPARTMENTS D2, P2 & P3

11. TWO PAINTED ADJUSTABLE ALUMINUM SLIDE-OUT PEG BOARD TOOL BOARDS IN COMPARTMENT P1
12. ONE PAINTED ADJUSTABLE SLIDE-OUT TRAY WITH CABLE RELEASE IN COMPARTMENT D1
13. THREE POLY TOOL BOXES (24" L X 11" W X 7" D) IN COMPARTMENT P3
14. CTECH 3-DRAWER DRAWER ASSEMBLY IN COMPARTMENT P3
15. ONE VERTICAL BOLT-IN PARTITION BETWEEN COMPARTMENTS D1-R1 & P1-R1
16. ONE VERTICAL PARTITION IN HATCH COMPARTMENT ABOVE P3; TWO IN HATCH ABOVE D2
17. ONE PAINTED SLIDE-OUT FLOOR MOUNTED TRAY IN COMPARTMENT R1
18. RACK WITH W-INSERTS FOR (5) EXTINGUISHERS IN COMPARTMENT D1
19. 4-BIN ROLLED HOSE STORAGE RACK IN COMPARTMENT D1
20. ONE VERTICAL PARTITION IN COMPARTMENTS P1 & P3

21. OIL DRY HOPPER IN HATCH ABOVE COMPARTMENT P1 WITH FLIP-DOWN CHUTE
22. NYLON STRAP RETENTION WEBBING IN COMPARTMENT P1
23. TWO CHROME TIE DOWN MOUNTS SHIPPED LOOSE
24. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
25. SUB-FEED CIRCUIT BREAKER PANEL IN COMPARTMENT D3
26. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 IN HATCH ABOVE D2 & P3 WITH 200' OF 10/3 CABLE, ARROW JUNCTION BOX AND TREADPLATE HOLDER
27. ONE 15A, 120V DUPLEX RECEPTACLE LOCATED IN COMPARTMENTS P1, P2 & P3
28. ONE 15A, 120V 6-PLACE SURGE PROTECTED RECEPTACLE STRIP LOCATED IN CAB
29. POLY SILL PLATE SPACER WITH NOTCH FOR 5.00" HOSE PASSAGE IN COMPARTMENT R1

REV	DATE	BY	CH	QUANTUM
18APR16	NPA	DTS	MAKE	
17MAR16	NPA	DTS	PIERCE	
19JAN16	NPA	CSH	MODEL	

		JOB NO.	29555
		SCALE	1:24
TITLE 1500-D-525P W/20 GAL FOAM CELL, 177" PUC RESCUE (2) XLAYS, LADDERS BELOW HOSEBED, DELUGE, GENERATOR		DATE	
		DRAWN BY	NPA
FOR CANONSBURG VOLUNTEER FIRE DEPARTMENT CANONSBURG, PENNSYLVANIA		CHECKED BY	CSH
		SHEET NO.	1 OF 1
DWG NO. 29555AD			