
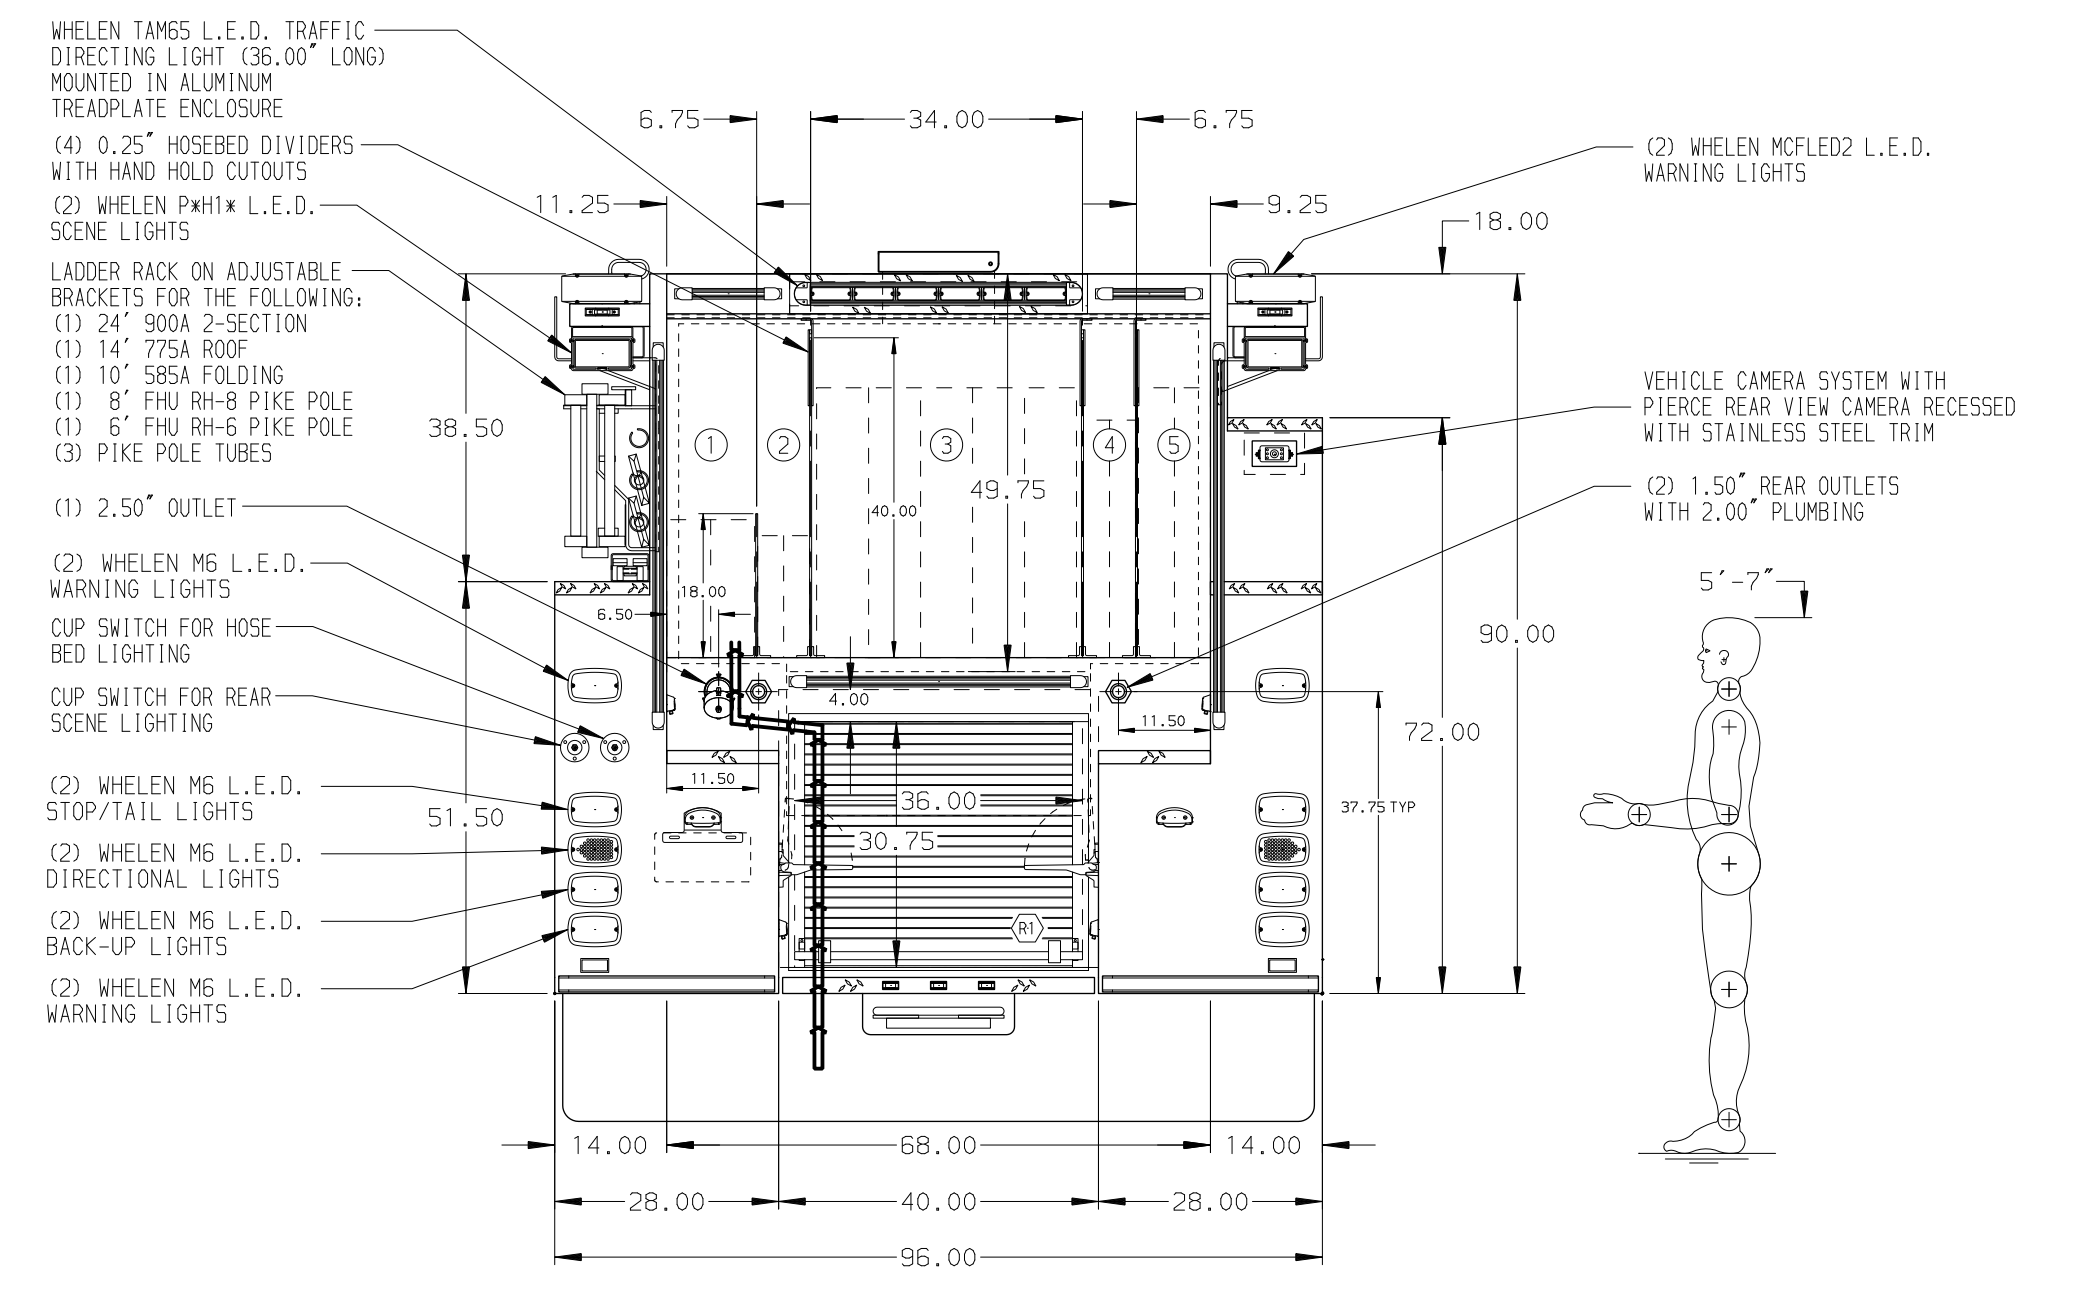


HOSEBED CAPACITIES

- ① 200' OF 3.00" D.J. HOSE
- ② 200' OF 1.75" D.J. HOSE
- ③ 1000' OF 4.00" KEY PRO-FLOW LDH
- ④ 400' OF 1.75" D.J. HOSE
- ⑤ 400' OF 2.50" D.J. HOSE

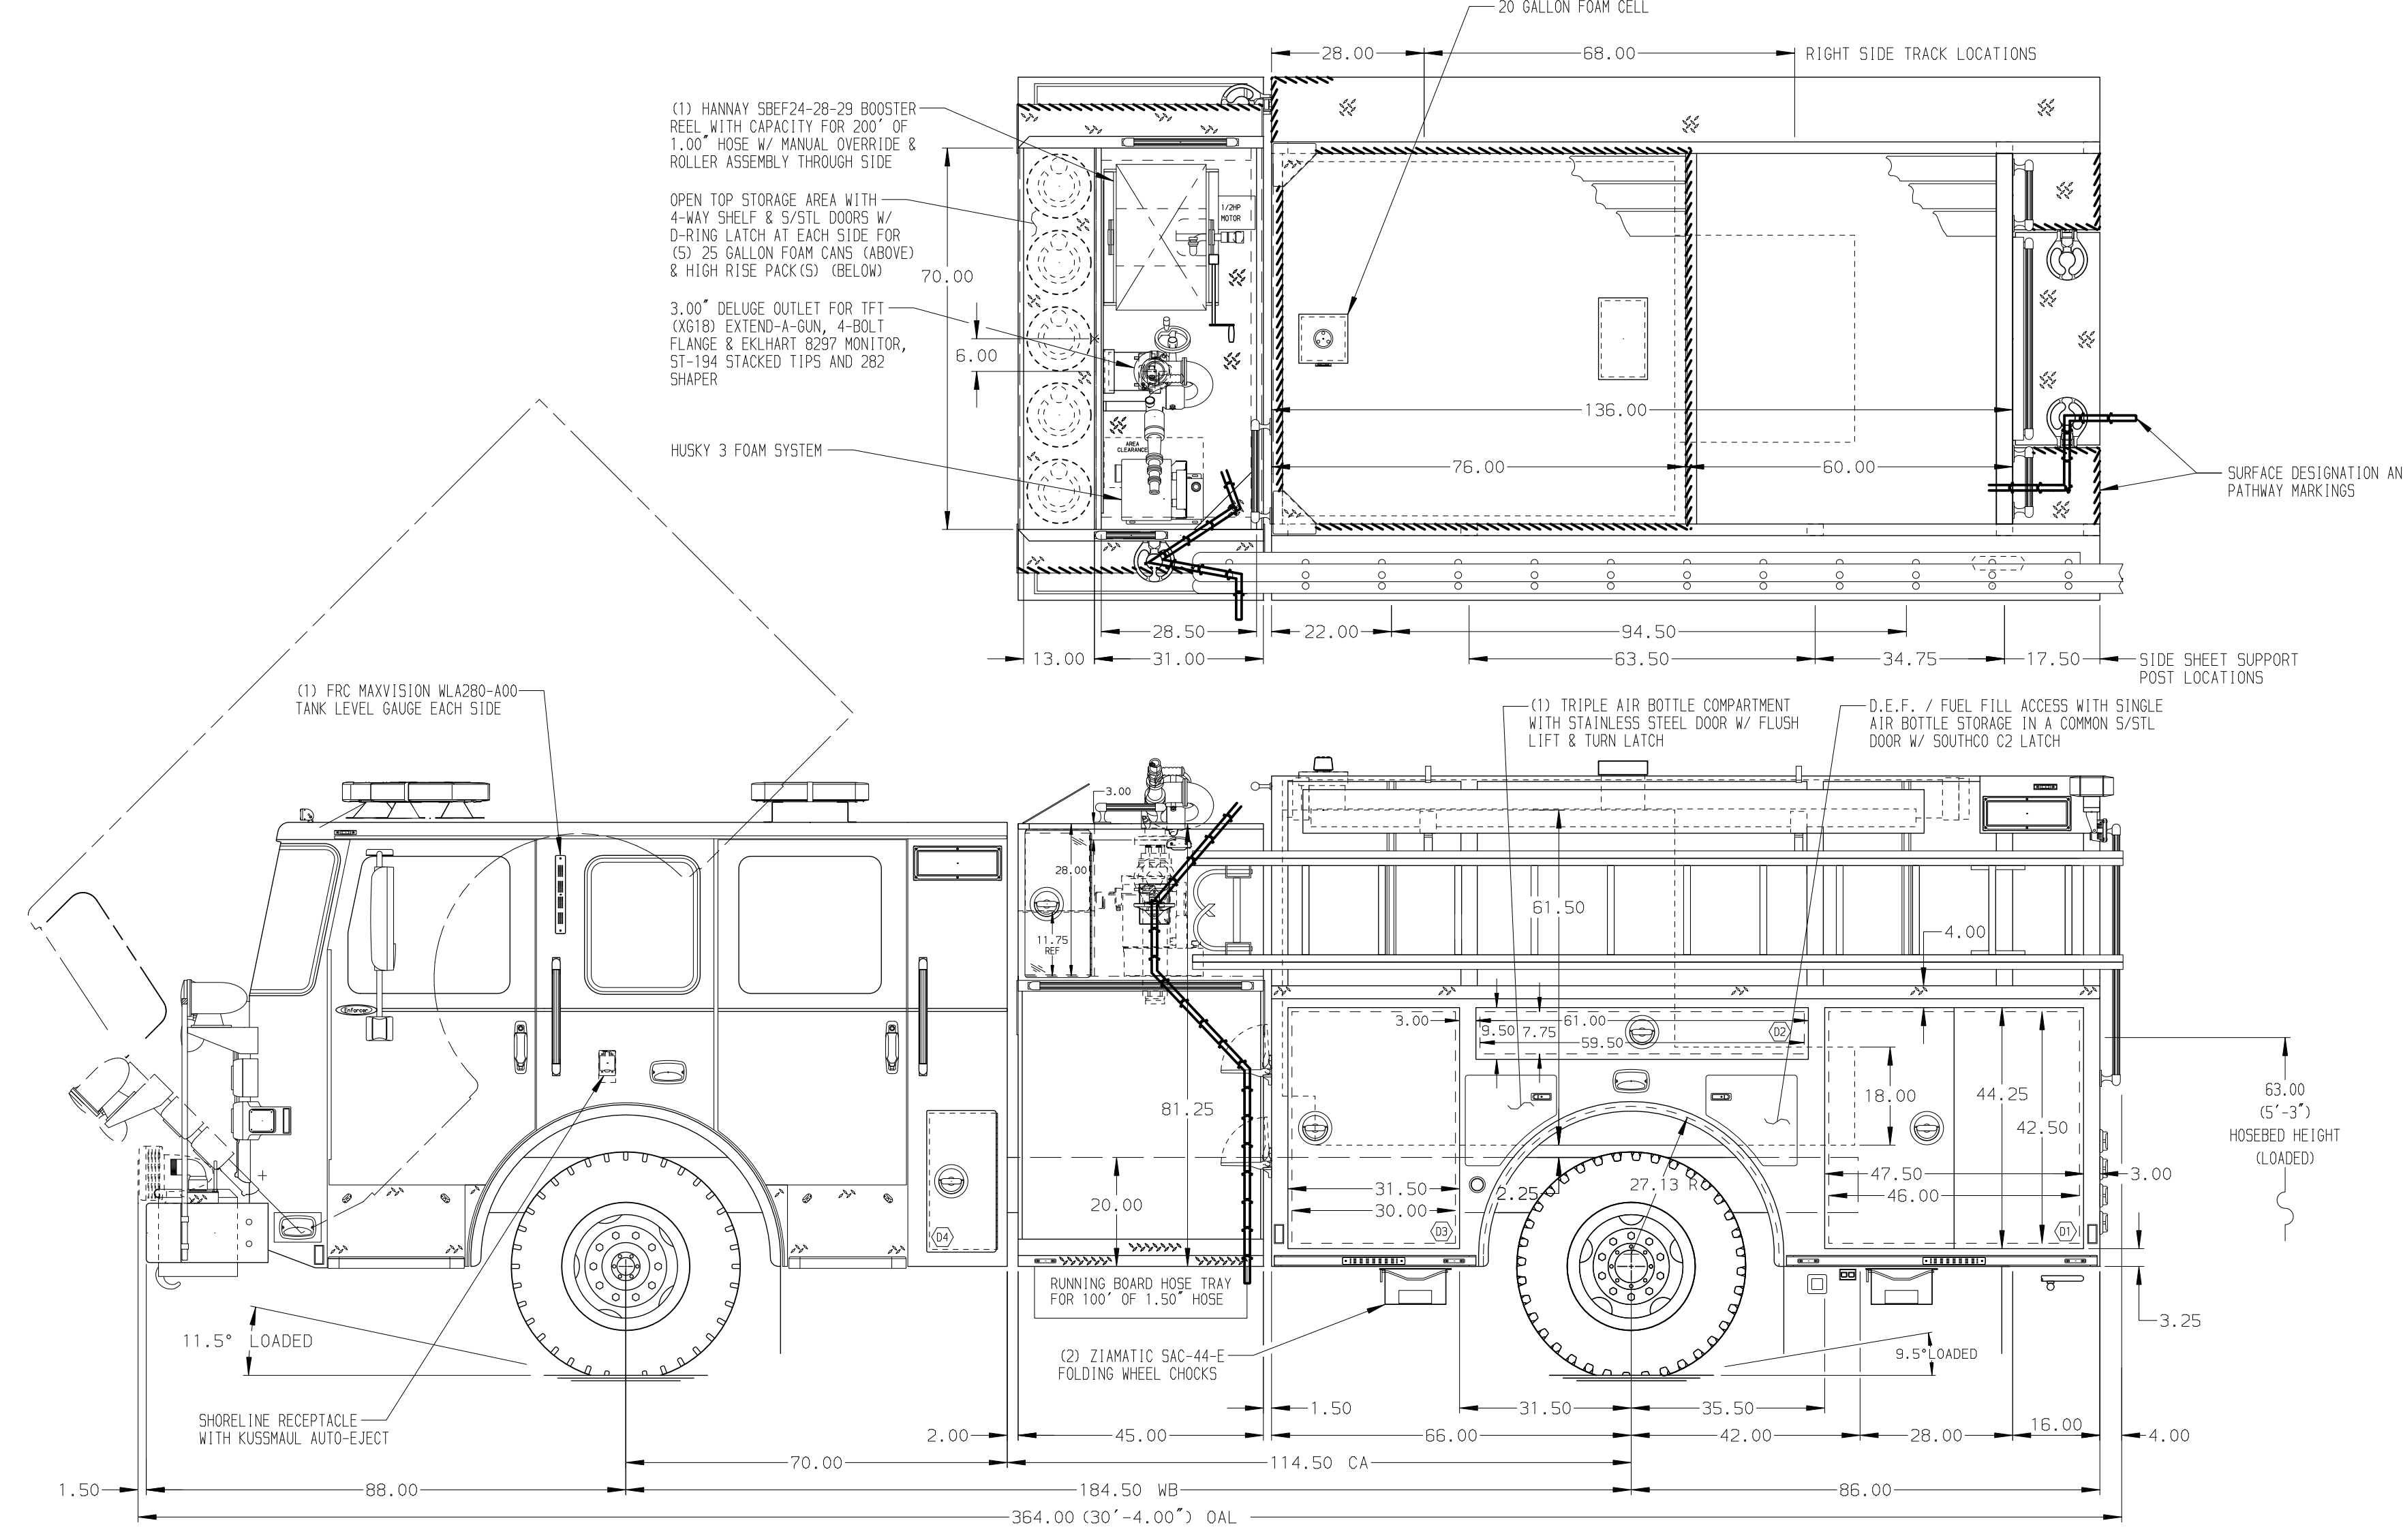

ALUMINUM BODY

MAXIMUM O.A.L. 364.00"

MAXIMUM O.A.H. 115.50"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. DRIP PAN GUARD FOR ROLL-UP DOOR ON COMPARTMENT R1
5. REVERSED HINGED DOOR ON COMPARTMENTS D3, D4, P3 & P4
6. TWO ADJUSTABLE FULL WIDTH/DEPTH SHELVES IN COMPARTMENT P1, & P3, ONE IN D3
7. ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENTS D1, D3, & P1
8. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT R1
9. ONE SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENTS P2 & D1
10. AIR INLET/OUTLET WITH DISCONNECT FITTING ON DS PUMP PANEL

11. ONE DUPLEX RECEPTACLE LOCATED IN CAB
12. ONE 4-PLACE DUPLEX RECEPTACLE LOCATED IN COMPARTMENTS P1 & D1
13. L.E.D. LIGHT STRIPS FOR WALKING SURFACES IN CARGO AREAS
14. ONE TRANSVERSE REAR COMPARTMENT PARTITION EACH SIDE
12. ONE 4-PLACE DUPLEX RECEPTACLE LOCATED IN CAB

REV	DATE	BY	CH	ENFORCER
09MAY18		GVH	DTs	MAKE
16APR18		GVH	CDK	PIERCE
23FEB18		GVH	NPA	MODEL

		JOB NO.	32167
		SCALE	1:24
TITLE 2000-D-1020P, 1000G WATER, 20G FOAM, 152" BODY SIDE CONTROL, BOOSTER REEL, FOAM SYSTEM		DRAWN BY	GVH
		CHECKED BY	NPA
FOR FALLOWFIELD TOWNSHIP VOLUNTEER FIRE CO. CHARLEROI, PENNSYLVANIA		DWG NO.	32167AD
		SHEET NO.	1 OF 1