

**PUMPER
BODY**

Long Aluminum 2nd Gen Pumper

CHASSIS

Arrow XT Chassis

**CHASSIS
AXLE, FRONT, CUSTOM**

22,800 lb TAK-4 Axle

AXLE, REAR

27,000 lb Meritor Axle

ENGINE

450HP Cummins L9

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

22" Extended Painted Steel

CAB

6700 Arrow XT Cab

**BODY
WATER TANK**

750 Gallon New York Style Water Tank

COMPT, PUMPER, REAR

30.75" FF RollUp Rear Compt, 25.88" Deep Flush Rear

COMPT, PUMPER, DRIVER SIDE

171" Lap Full Height & Depth Front & Rear

COMPT, PUMPER PASS. SIDE

171" Lap Full Height & Depth Front & Rear

**FIRE SUPPRESSION
PUMPHOUSE**

48" Control Zone Side Mount

PUMP

2000 GPM Waterous CSU

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR

Harrison 10kW MCR Hydraulic Generator

Foam System

Foam System Not Required


Foam Cell


Foam Cell Not Required

Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
2. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT
3. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
4. CIRCUIT BREAKER PANEL LOCATED PER SHOP ORDER
5. PARTITION BETWEEN COMPARTMENTS D1/R1 AND P1/R1
6. TWO 4-PLACE RECEPTACLE STRIPS LOCATED PER SHOP ORDER
7. HANWAY CABLE REEL, MODEL SF1618-17-18 WITH 200' OF 10/3 CABLE LOCATED IN DRIVER SIDE HATCH COMPARTMENT
8. OIL DRY HOPPER LOCATED IN DRIVER SIDE HATCH COMPARTMENT

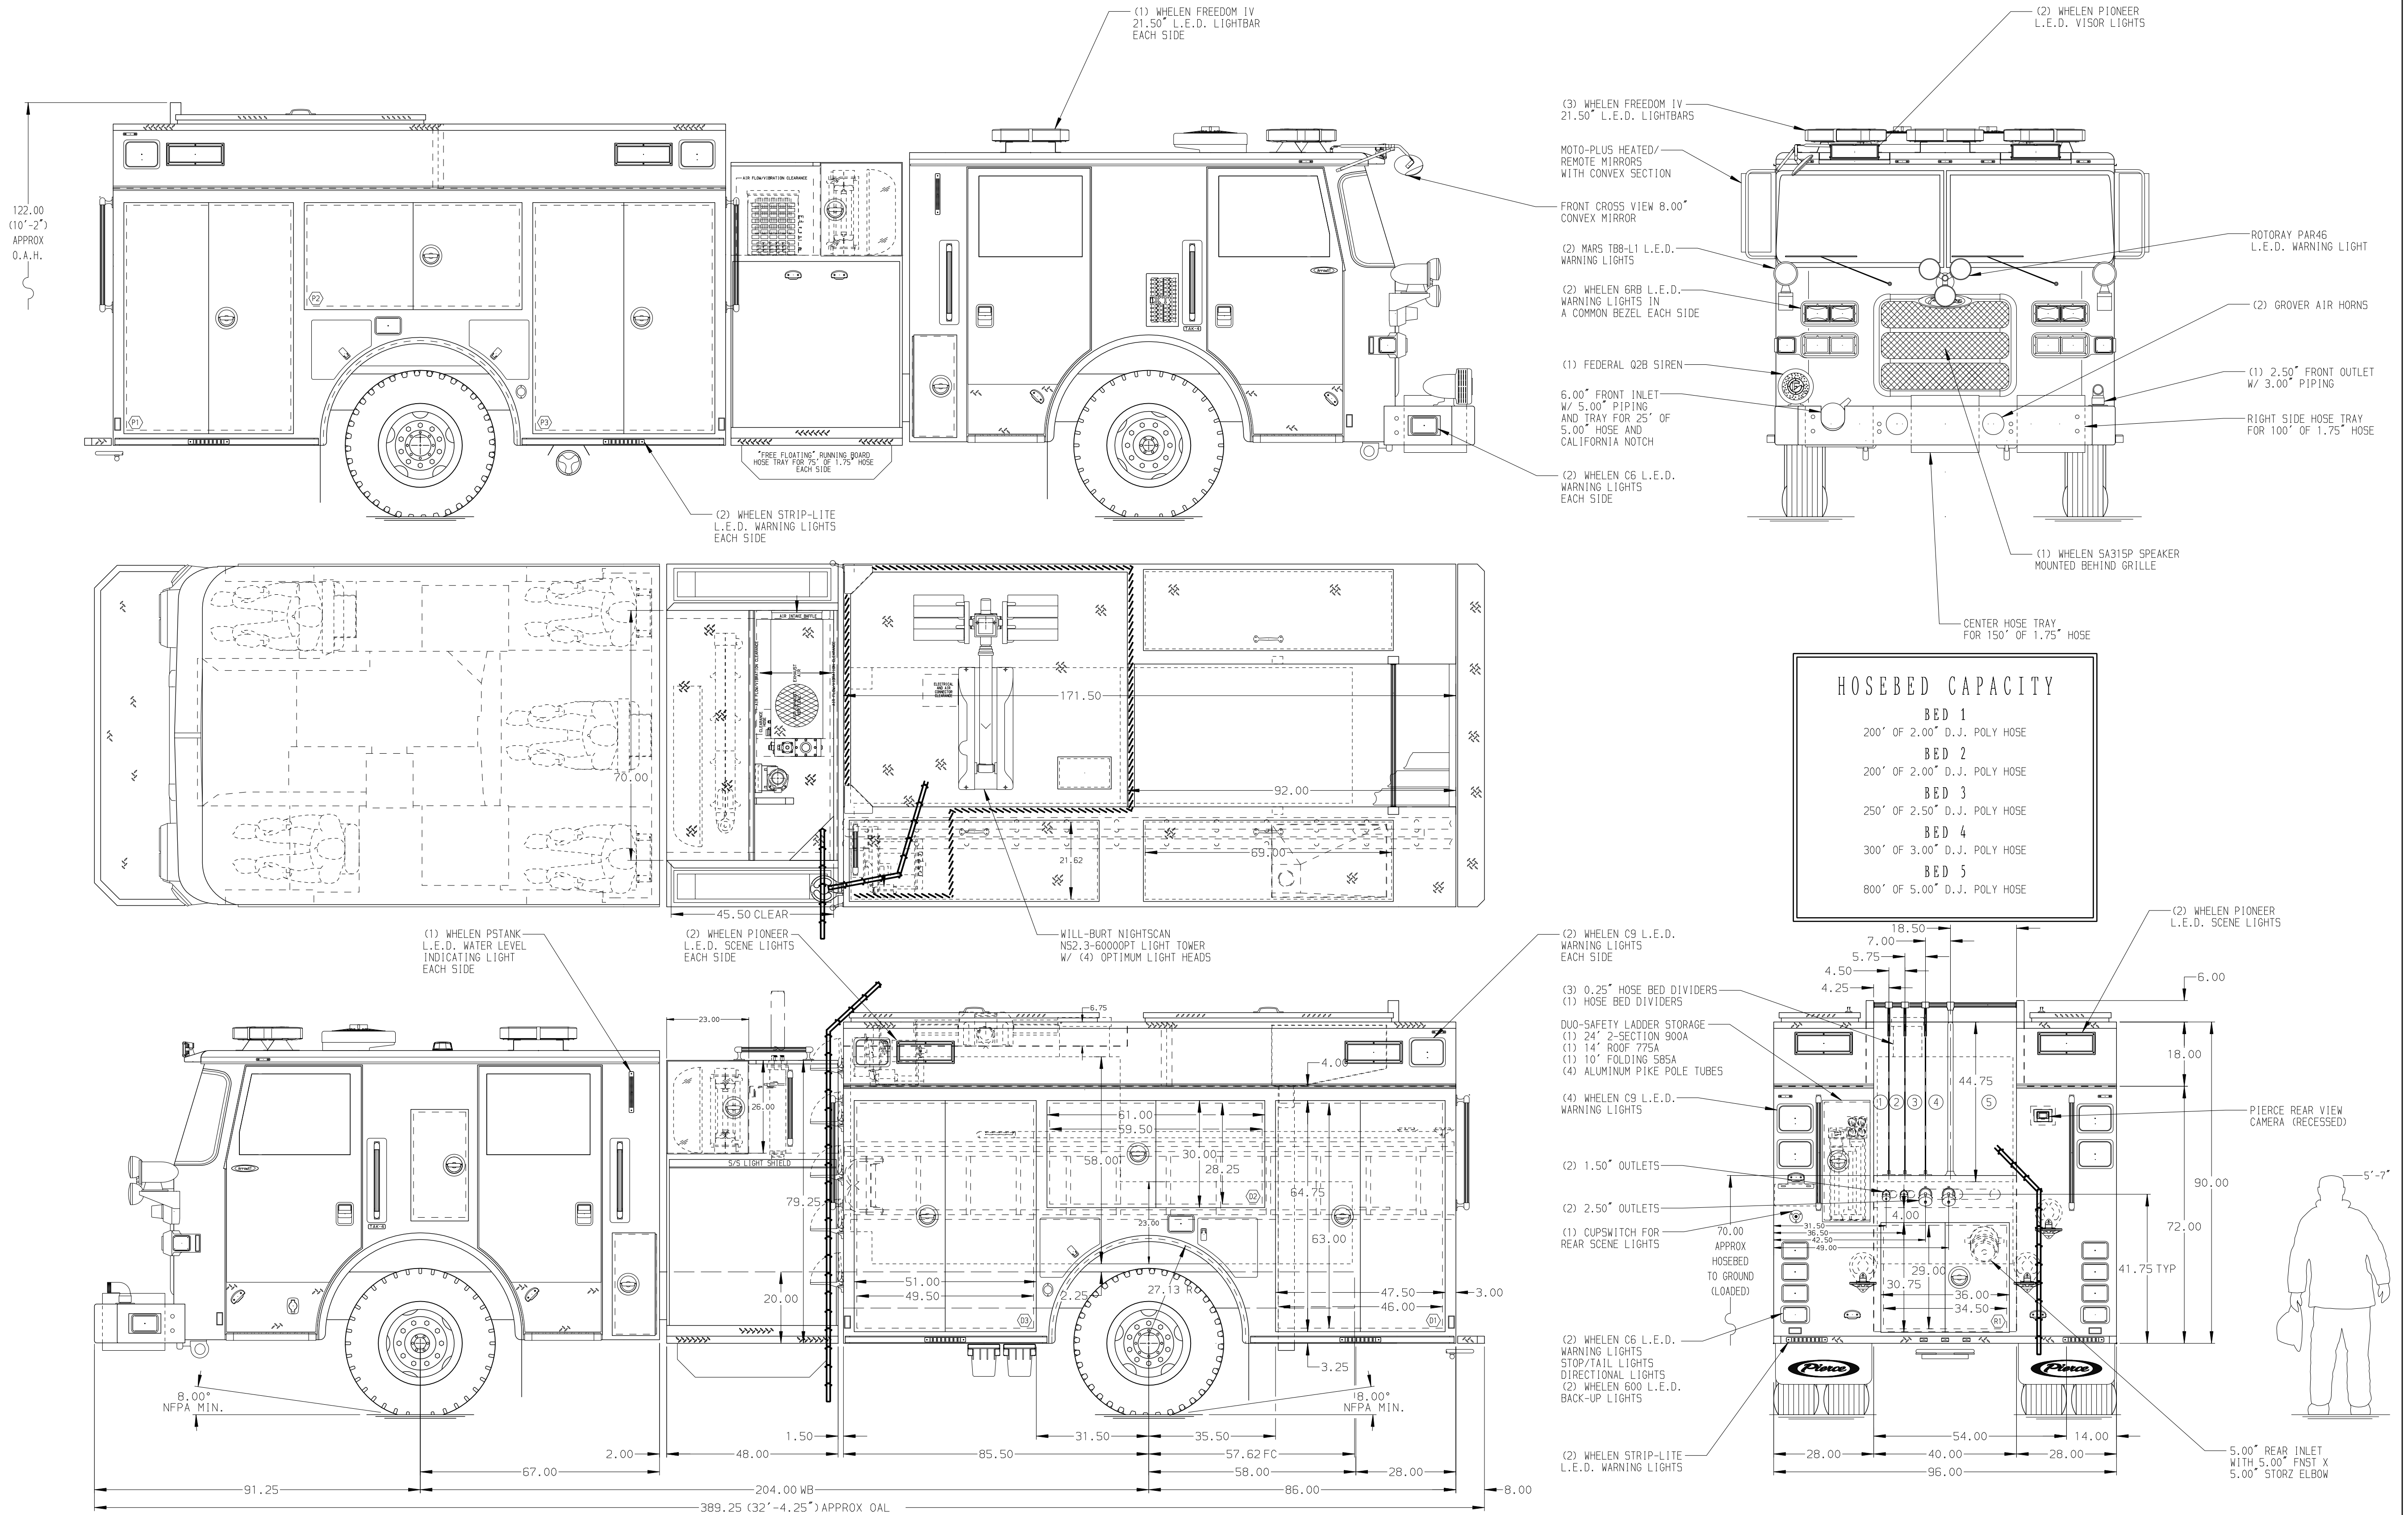

 PIERCE MANUFACTURING INC.		JOB NO.	32560
		SCALE	DATE
TITLE	PIERCE PUMPER APPROVAL DRAWING	DRAWN BY	COL
MAKE	ROSTRAVER CENTRAL FIRE DEPARTMENT	CHECKED BY	KBO
MODEL	ARROW XT	SHEET SIZE	SHEET NO.
DWG NO.	32560AD	D	1 OF 1

REV	DATE	BY	CH	ARR
1	11MAY18	COL	KBO	XT