
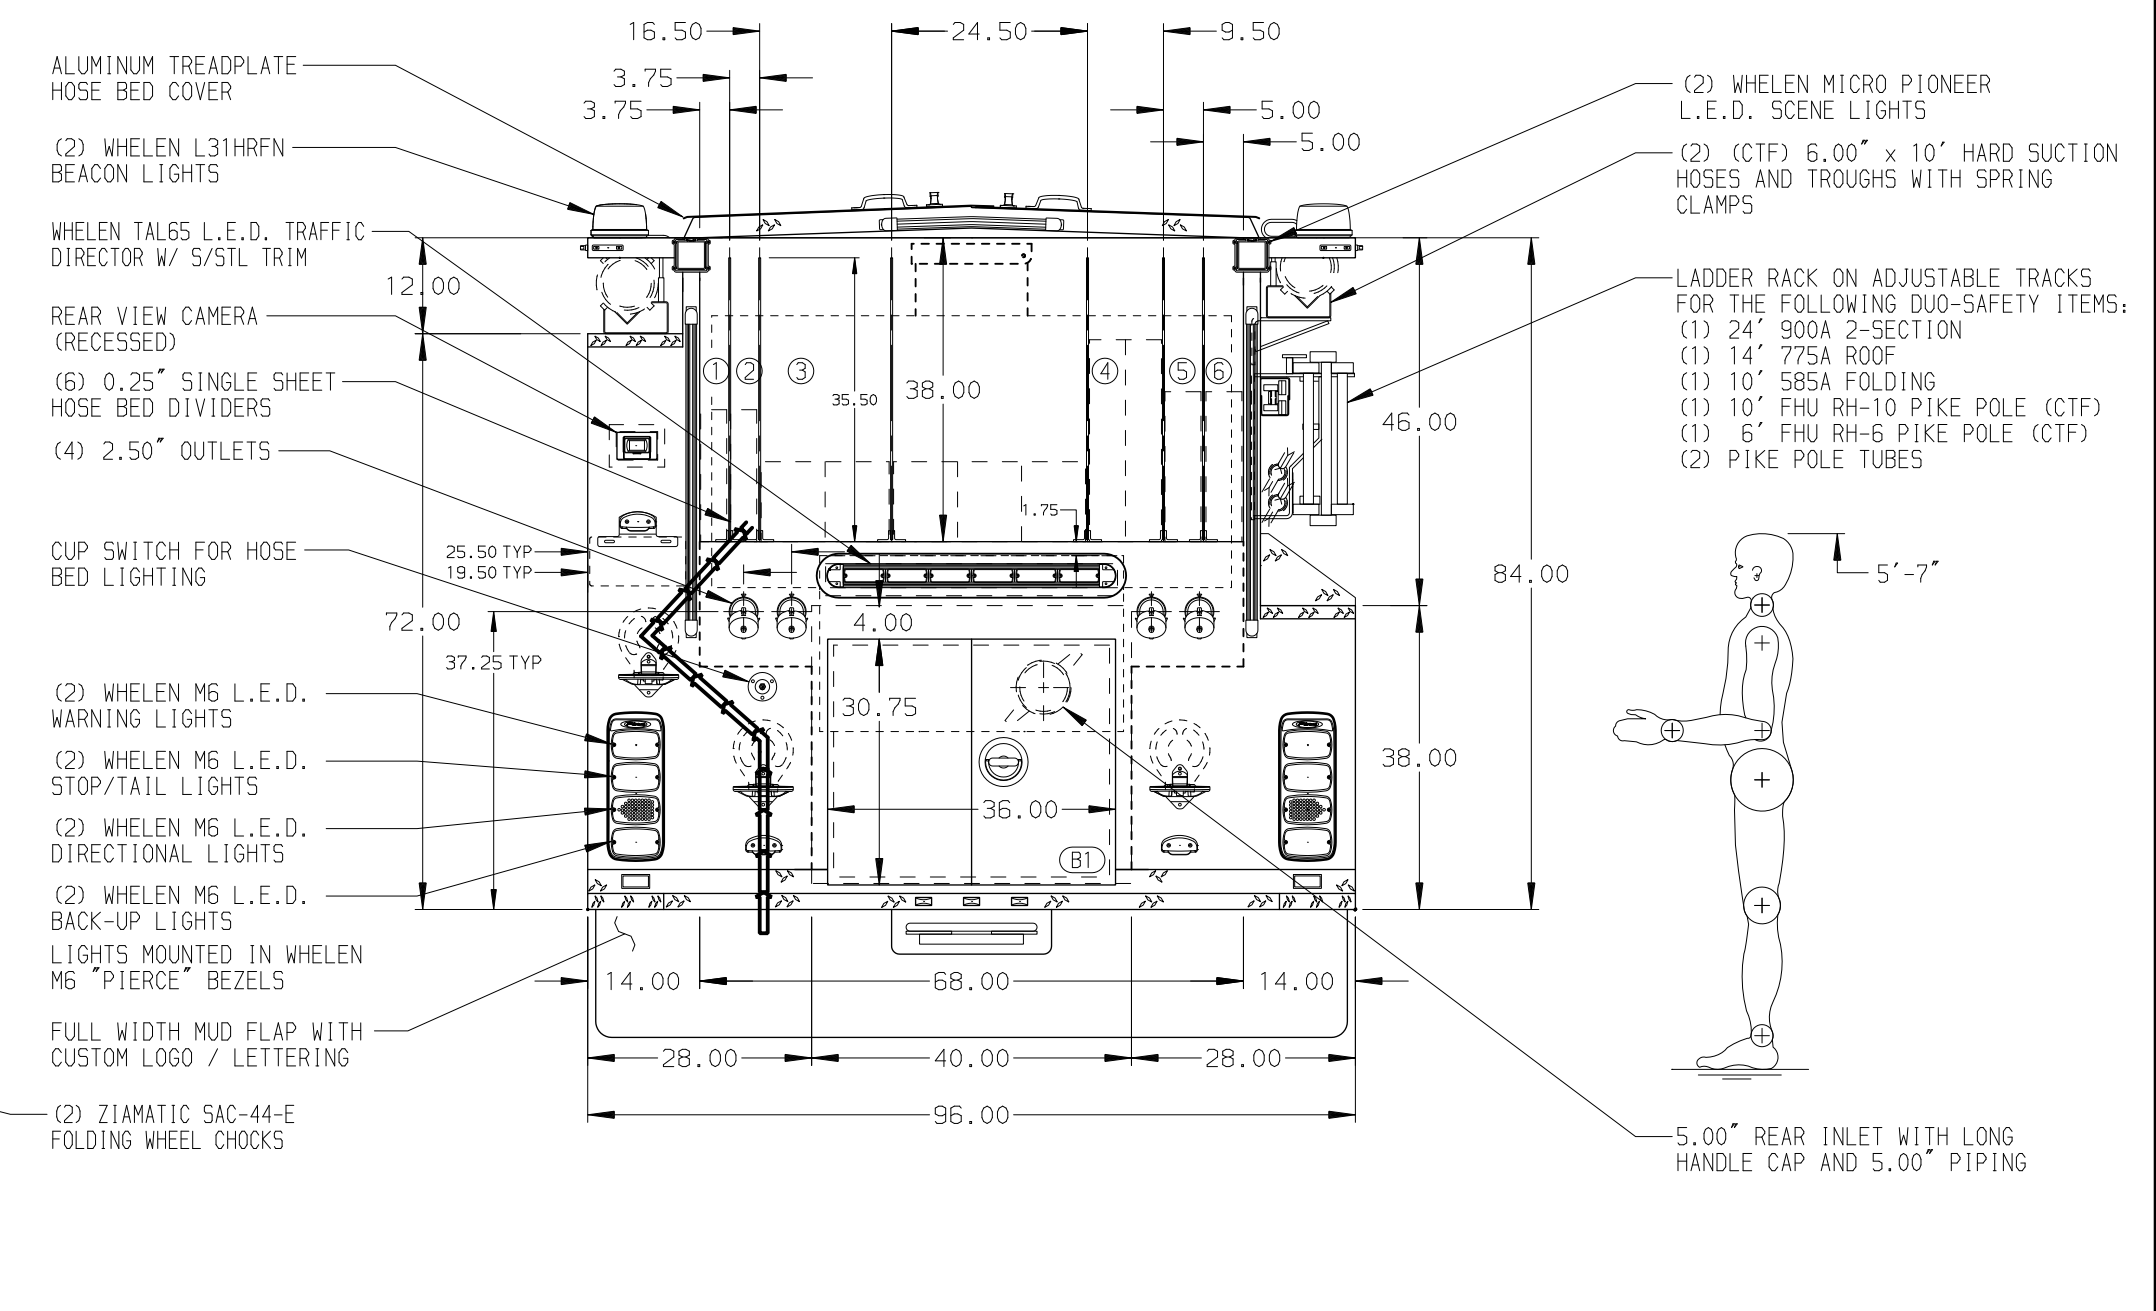


HOSEBED CAPACITIES

- ① 200' OF 1.75" HOSE
- ② 200' OF 1.75" HOSE
- ③ 1200' OF 5.00" HOSE
- ④ 800' OF 5.00" HOSE
- ⑤ 500' OF 2.50" HOSE
- ⑥ 200' OF 2.50" HOSE
- ⑦ 200' OF 2.50" HOSE

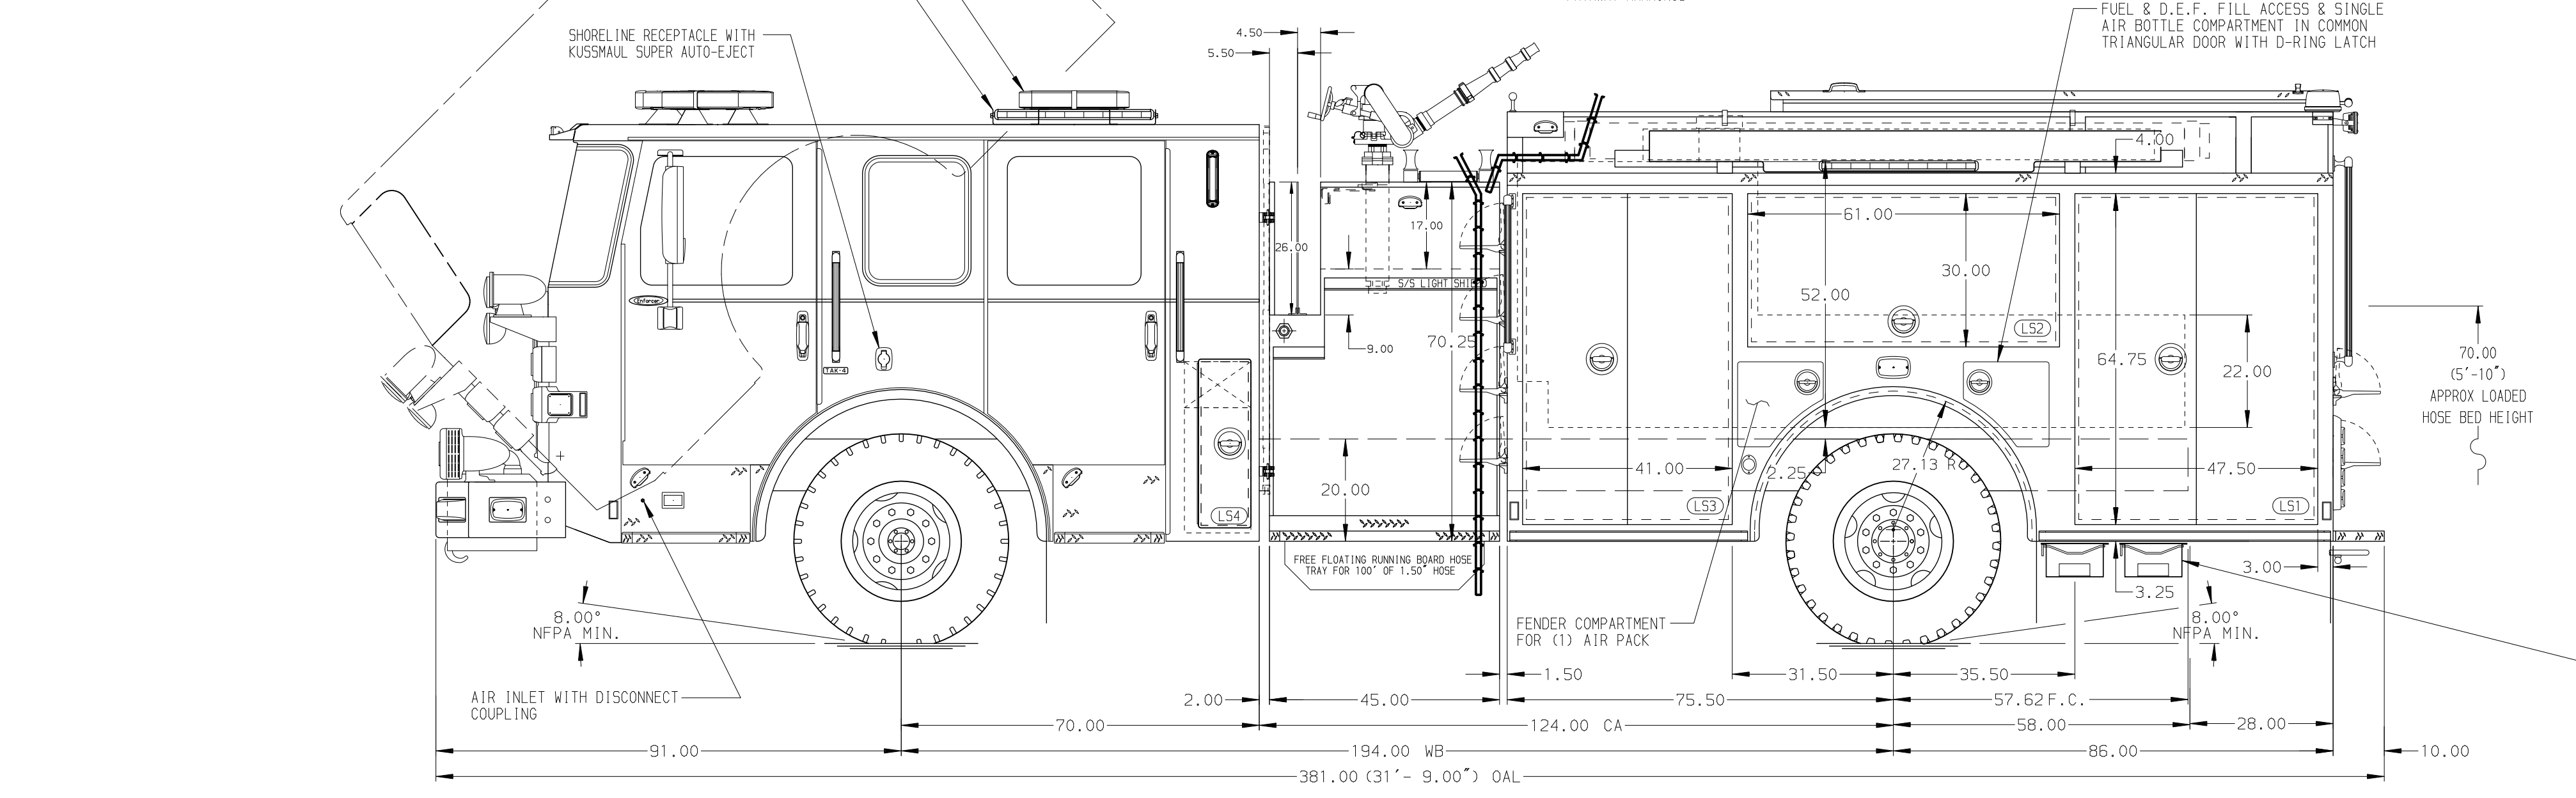

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER/COMPRESSOR LOCATED IN COMPARTMENT LS3
2. BATTERY CHARGER INDICATOR LOCATED AT DRIVER'S SIDE STEP AREA
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT L51, R51, & B1
6. THREE 120V DUPLEX RECEPTACLES LOCATED INSIDE CAB
7. FOUR 120V DUPLEX RECEPTACLES LOCATED INSIDE BODY
8. ONE SWING-OUT TOOLBOARD WITH PEGBOARD PATTERN IN COMPARTMENT LS2
9. PEGBOARD PANEL ON BACK WALLS OF COMPARTMENTS L51, L52, & L53

REV	DATE	BY	CH	ENFORCER
1	13JAN20	MWA	DTS	PIERCE
2	26NOV19	GVH	DTS	MODEL

		JOB NO.	34375
		SCALE	1:24
TITLE 2000-D-750 GAL POLY, 161" FH LS, LOW RS, FDLER LADDER BRACKETS, (2) CROSSLAYS, DELUGE FOR BETHLEHEM TOWNSHIP FIRE DEPARTMENT BETHLEHEM, PENNSYLVANIA	DRAWN BY	GVH	170CT19
	CHECKED BY	NPE	230CT19
DWG NO.	34375AD		SHEET NO.
			1 OF 1