

East Allen Twp

Job #40363

THIS REPORT CONTAINS PHOTOS OF:

- The truck staged for pump testing.

GLICK

FIRE EQUIPMENT COMPANY, INC.


Pierce
46






GOODYEAR
ARMOR MAX MSA




40363
40363










40363


40363





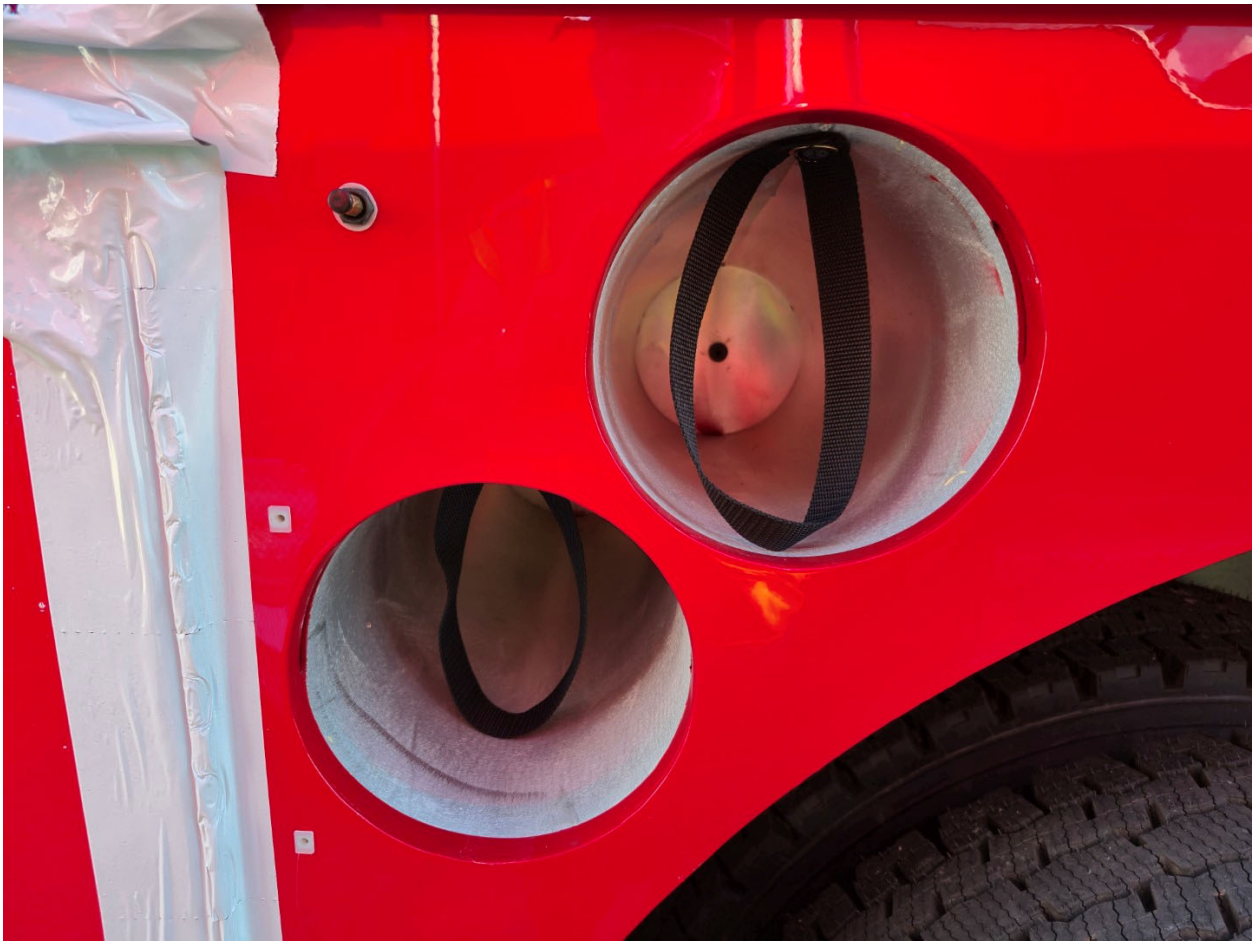

Pierce





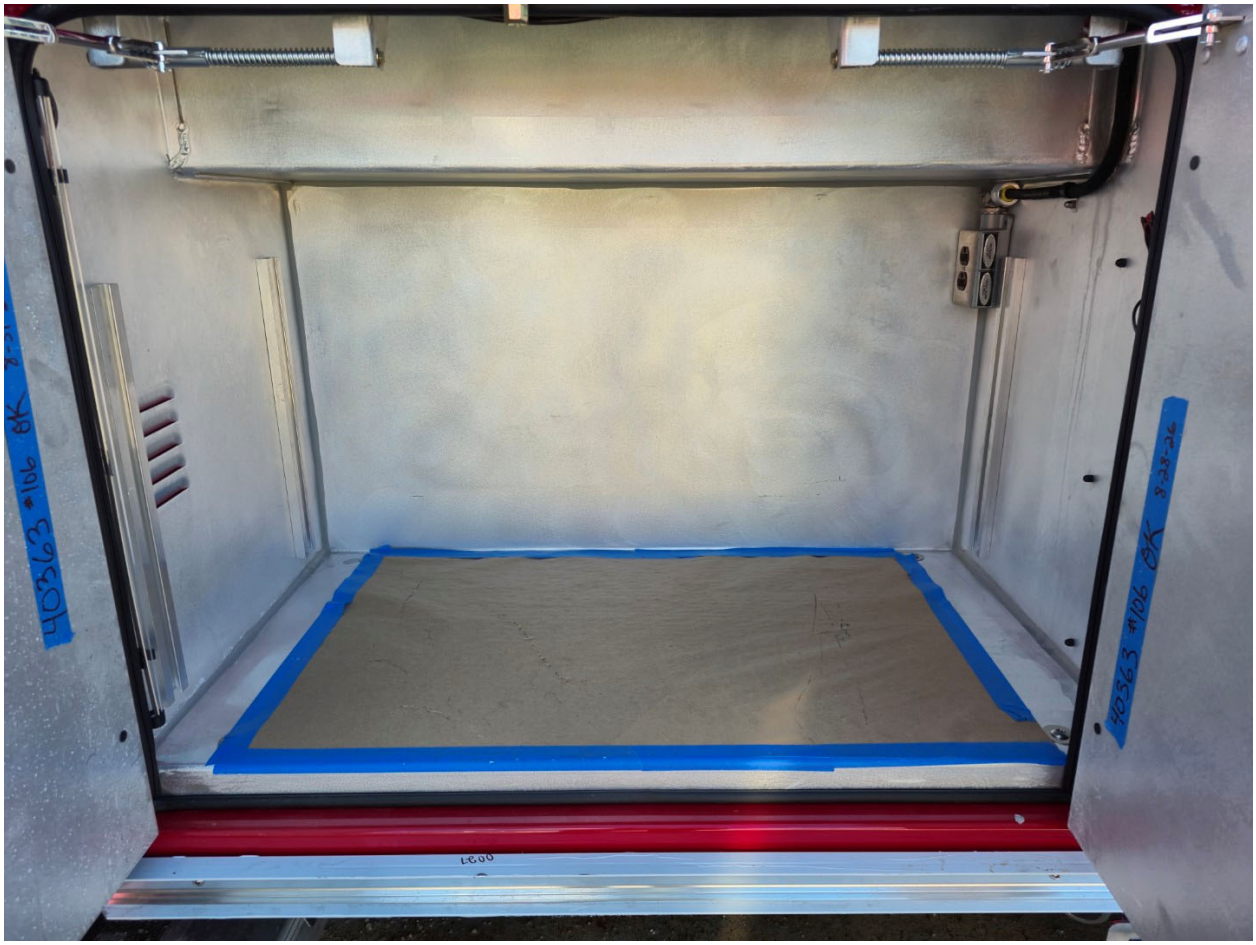












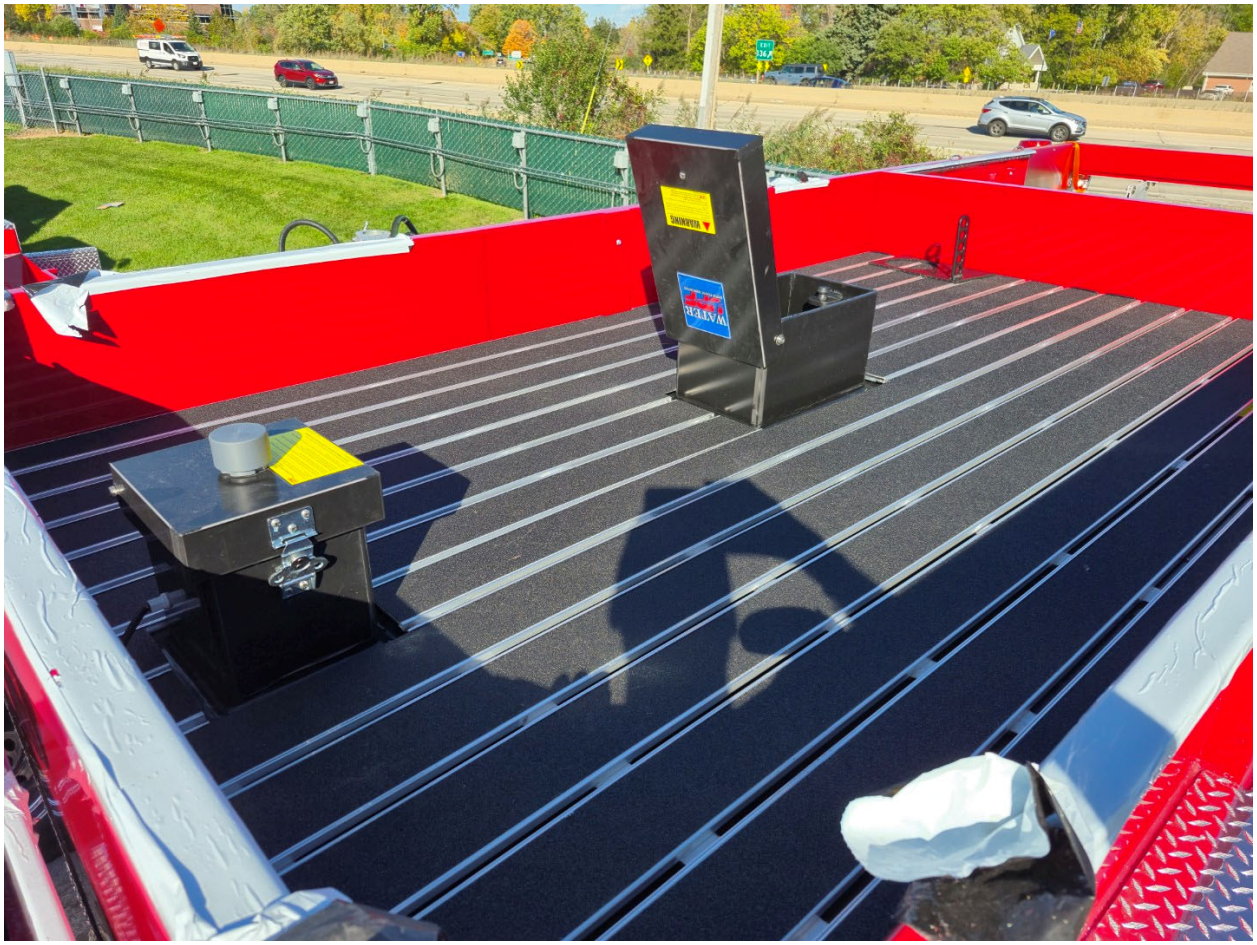





40363

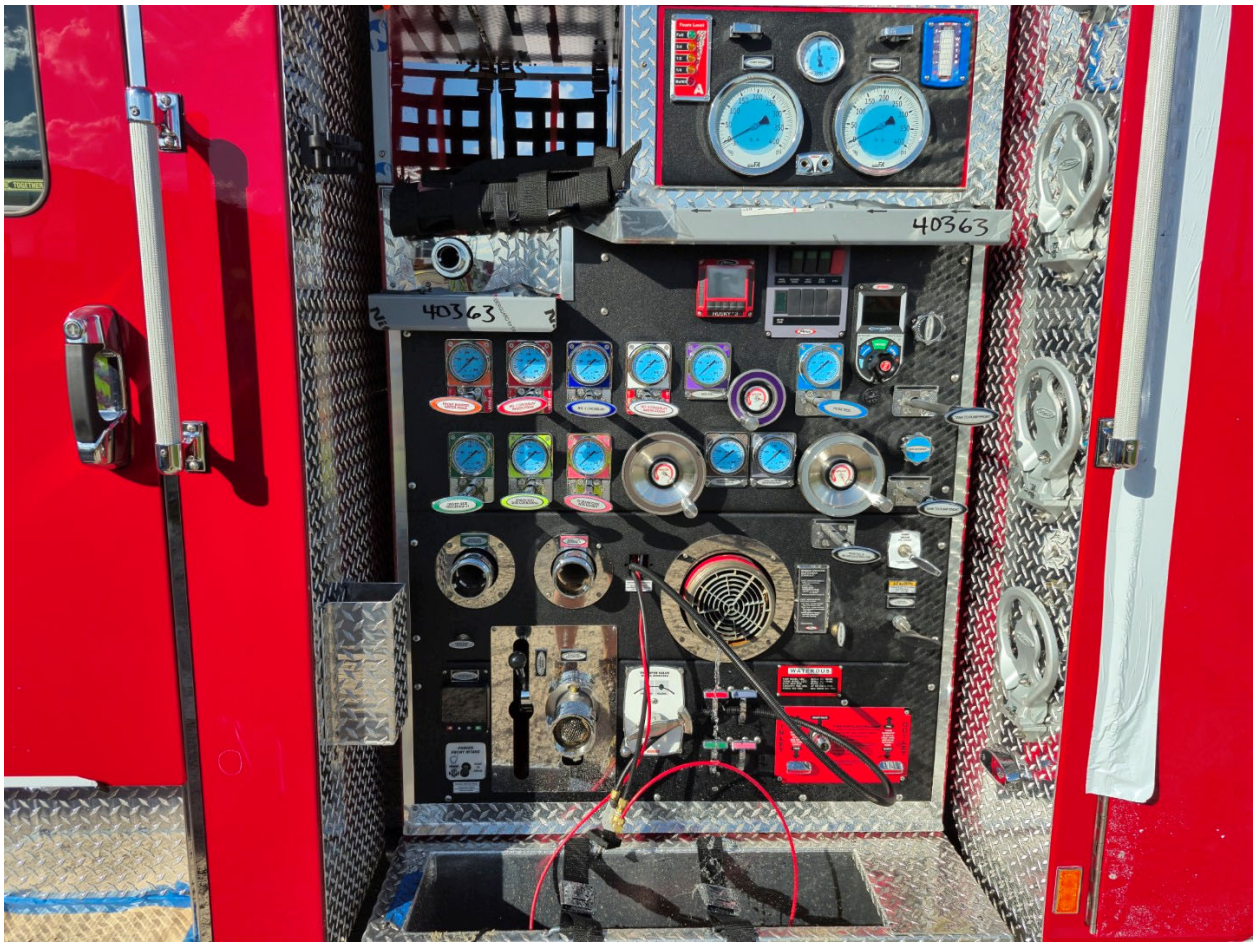











40363
40363


Foam Level
Full
3/4
1/2
1/4
Refill
A
PUMP INTAKE
PUMP DISCHARGE
WATER
"Hg
psi
series FA
UPPER LIGHT SHIELD

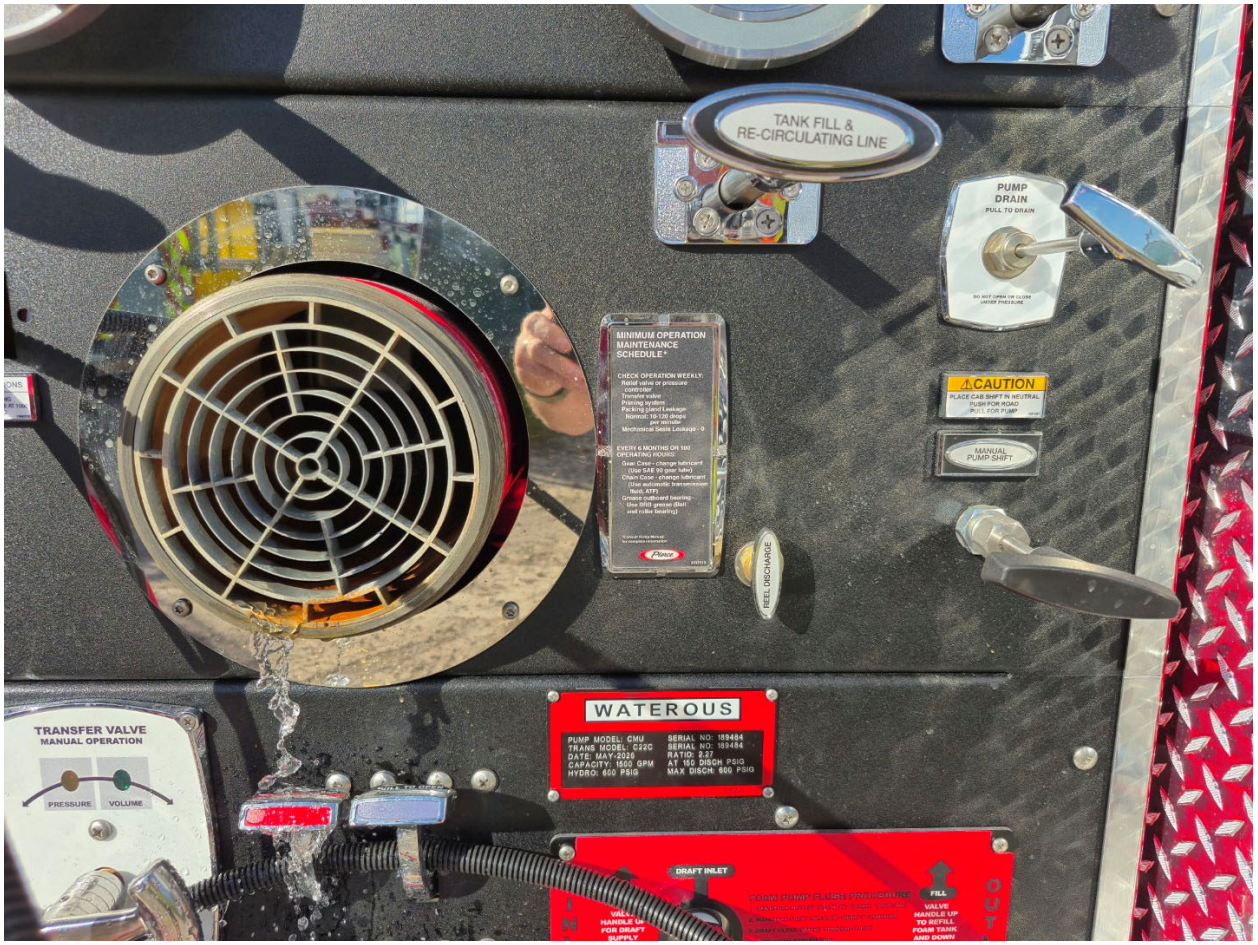

40363
HUSKY 3
PANEL LIGHTS
DRIVERS SCENE
PASS SCENE
REAR SCENE
GTFO
OK TO PUMP
FRC
PUMPBOSS
PRESET
PRESSURE
RPM
DECK GUN
FOAM
HOSE REEL
REEL BLOWOUT
TANK TO PUMP FRONT
LARGE DIAMETER DISCHARGE PS
LARGE DIAMETER DISCHARGE REAR


PANEL LIGHTS
DRIVERS SCENE
PASS SCENE
REAR SCENE
GTFO
OK TO PUMP
Pierce
OK TO PUMP


LARGE DIAMETER DISCHARGE PS
LARGE DIAMETER DISCHARGE REAR
REEL BLOWOUT
TANK TO PUMP FRONT
PUMP DRAIN
PULL TO DRAIN
TANK FILL & RE-CIRCULATING LINE
CAUTION
MANUAL PUMP SHIFT


40363
HUSKY 3
FRONT BUMPER WATER-FOAM
NO. 1 CROSSLAY WATER-FOAM
NO. 2 CROSSLAY
NO. 3 CROSSLAY WATER-FOAM
DRIVER SIDE DISCHARGE #1
PASSENGER SIDE DISCHARGE
DRIVER SIDE DISCHARGE #2


DRIVER SIDE DISCHARGE #1
DRIVER SIDE DISCHARGE #2
FRONT INLET AIR BLEED
FRONT INLET
DRIVER SIDE AUXILIARY INLET
TRANSFER VALVE
MANUAL OPERATION
PRESSURE
VOLUME

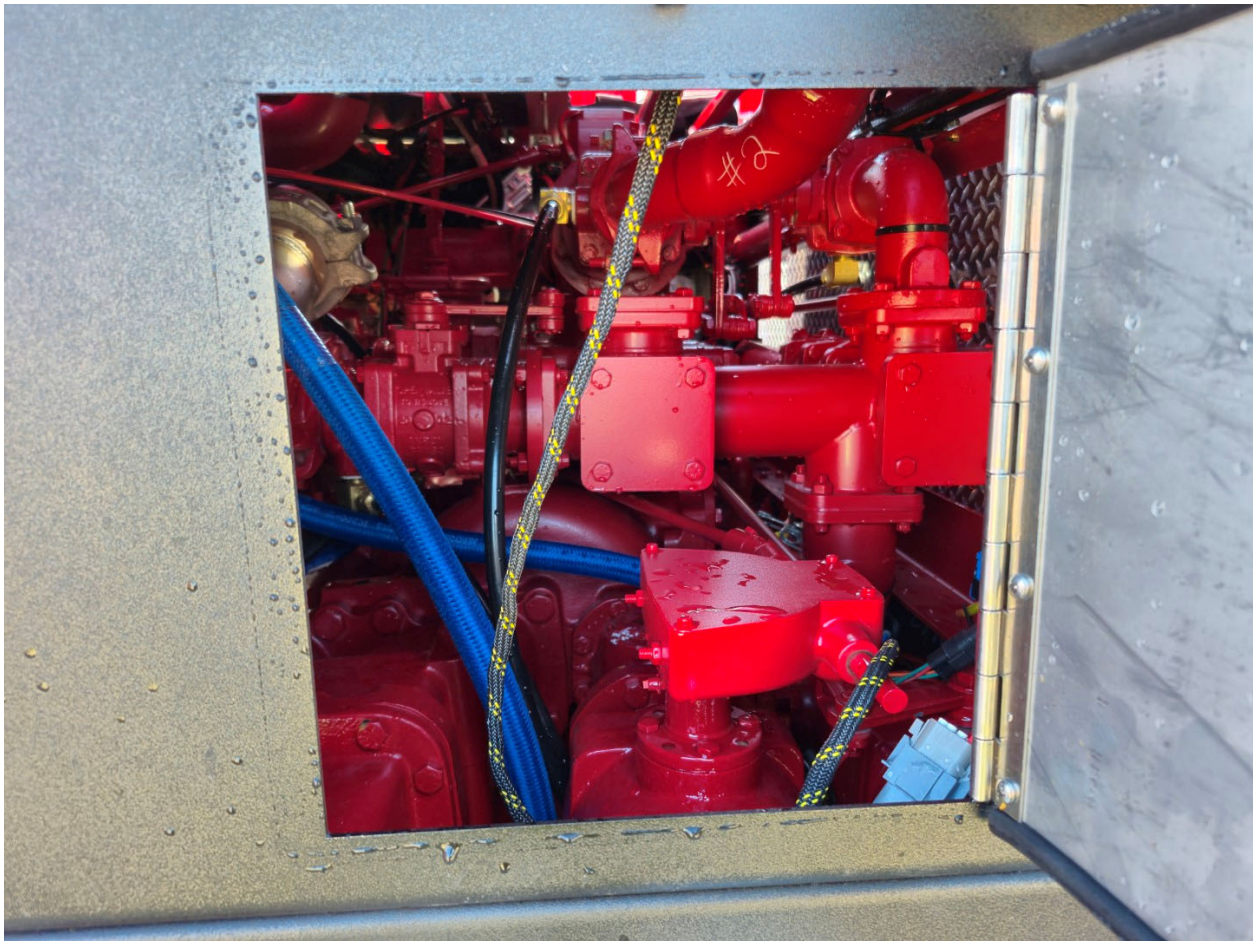

TANK FILL &
RE-CIRCULATING LINE
PUMP
DRAIN
PULL TO DRAIN
MINIMUM OPERATION
MAINTENANCE
SCHEDULE*
CAUTION
PLACE CAB SHIFT IN NEUTRAL
PUSH FOR ROAD
PULL FOR PUMP
MANUAL
PUMP SHIFT
PEEL DISCHARGE
TRANSFER VALVE
MANUAL OPERATION
PRESSURE
VOLUME
WATEROUS
PUMP MODEL: CMU
TRANS MODEL: C22C
DATE: MAY-2026
CAPACITY: 1500 GPM
HYDRO: 600 PSIG
SERIAL NO: 189484
SERIAL NO: 189484
RATIO: 2.27
AT 150 DISCH PSIG
MAX DISCH: 600 PSIG
DRAFT INLET
FOAM PUMP FLUSH PROCEDURE
FILL
VALVE
HANDLE UP
TO REFILL
FOAM TANK
AND DOWN
TO INJECT
FOAM
INJECT
OUTLET
INLET
DRAFT
VALVE
HANDLE UP
FOR DRAFT
SUPPLY
AND DOWN
FOR TANK
SUPPLY
TANK
PULL TO OPEN
NO. 1 CROSSLAY
PULL TO OPEN
LARGE DIAMETER
DISCHARGE REAR
PULL TO OPEN
DRIVER SIDE
DISCHARGE #1
PULL TO OPEN
DRIVER SIDE
DISCHARGE #2

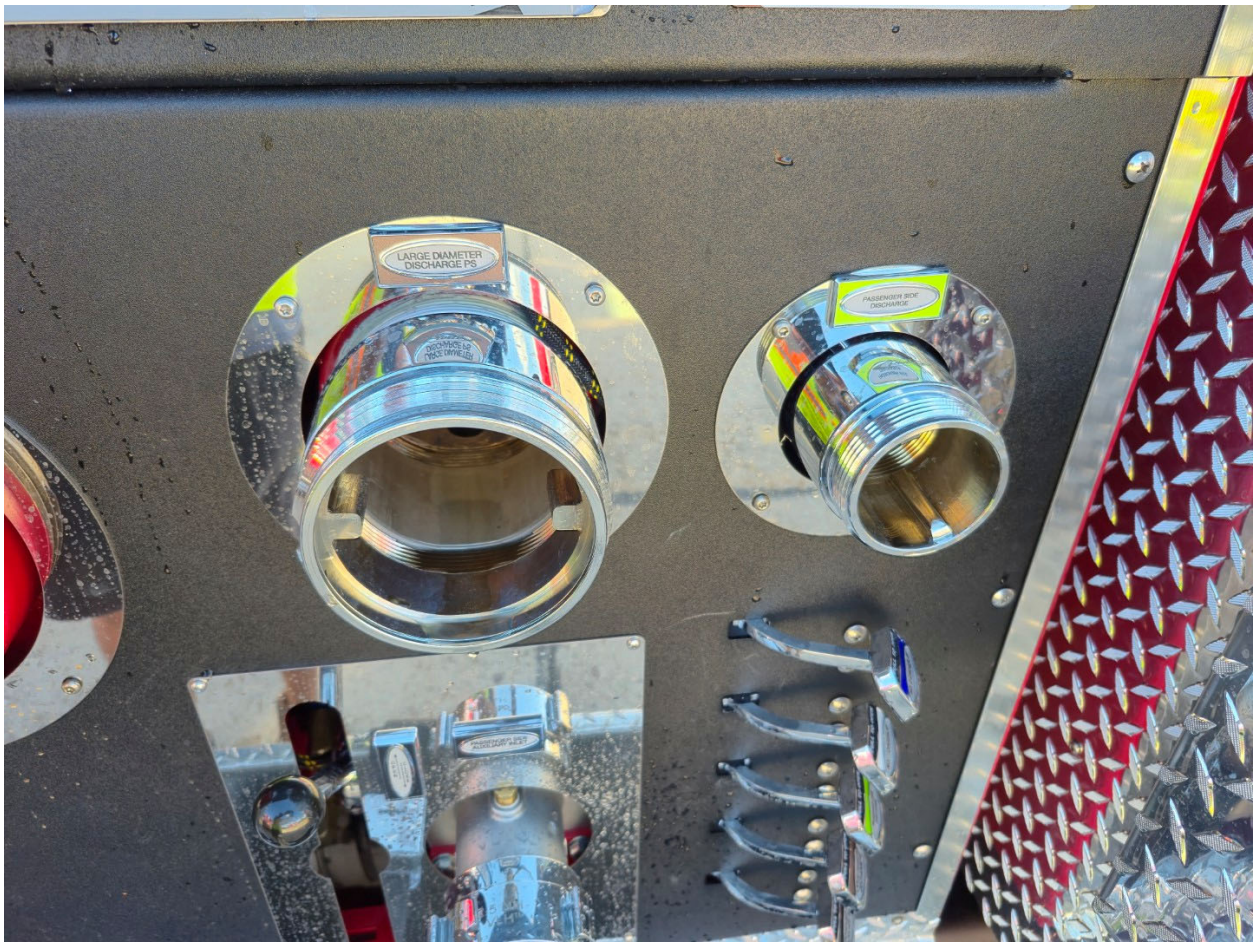

DRIVER SIDE
AUXILIARY INLET
TRANSFER VALVE
MANUAL OPERATION
PRESSURE
VOLUME
PRIMER
FRONT INTAKE
PUSH
TO
PRIME

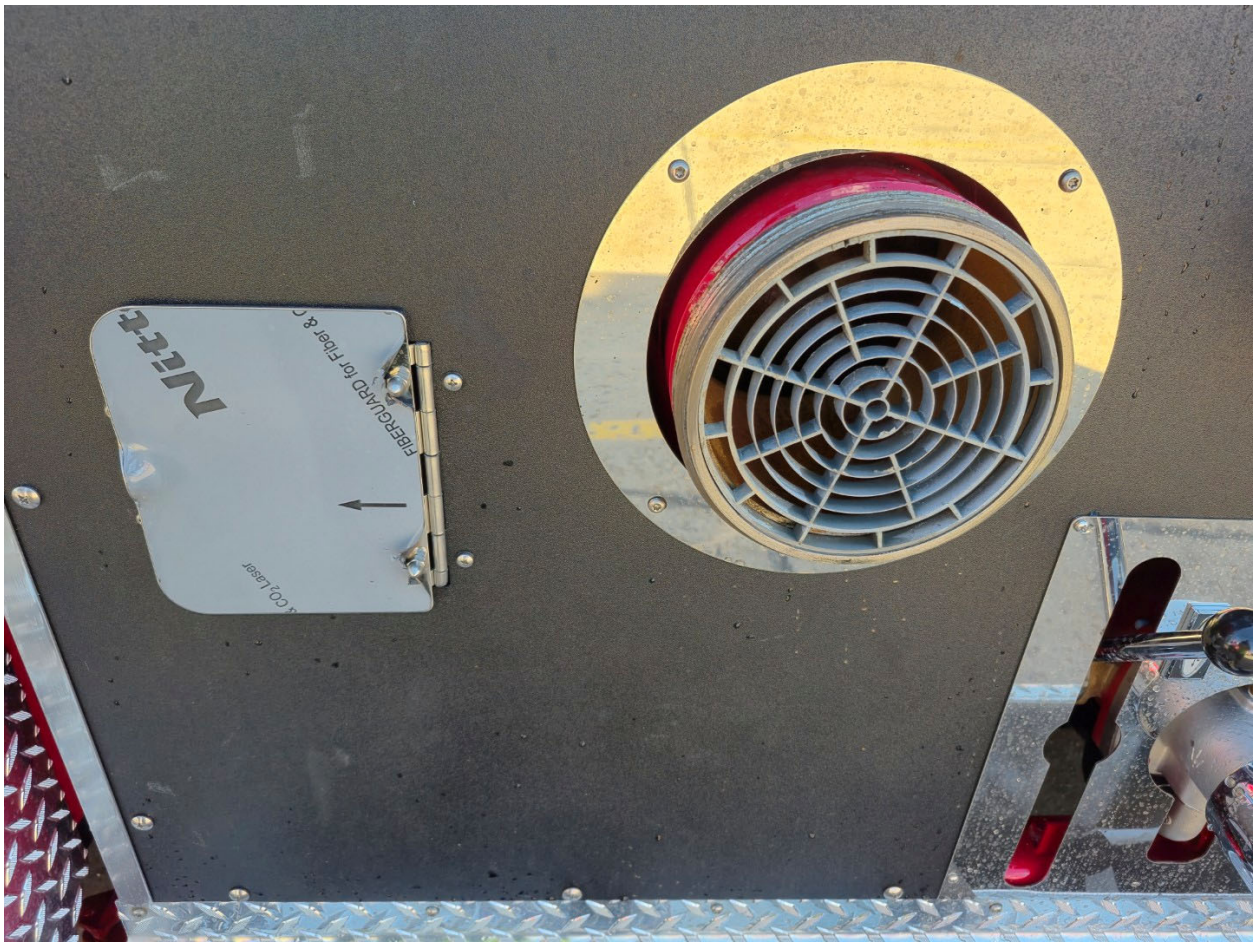

FRONT INLET
AIR BLEED
FRONT INLET
DRIVER SIDE
AUXILIARY INLET
PRIMER
FRONT INTAKE
TRIDENT
AIR
PRIME
PUSH
TO
PRIME
PRIMING INSTRUCTIONS


40363
40363
CAB LIFT


40363
REEL REWIND
CAB LIFT OPERATING INSTRUCTIONS
CAUTION
DANGER
RAISE
ACTIVATE
2644992-0001
CAB LIFT




LARGE DIAMETER
DISCHARGE PS
PASSENGER SIDE
DISCHARGE


NICHE
FIBERGUARD for Fiber & C
CO2 LASER




PULL TO OPEN
NO. 2 CROSSLAY
PULL TO OPEN
NO. 3 CROSSLAY
PULL TO OPEN
PASSENGER SIDE DISCHARGE
PULL TO OPEN
LARGE DIAMETER DISCHARGE PS
PULL TO OPEN
PASSENGER SIDE AUXILIARY INLET
PASSENGER SIDE AUXILIARY INLET
OPEN
CLOSE