

PUMPER

BODY

Short Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

24,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 6th Gen, 3000 EVS P

BUMPER

19" Extended Painted Steel

CAB

7000 Enforcer Cab

BODY

TOTAL TANK CAPACITY

750 Gallon New York Style Poly Tank

WATER CAPACITY

750 Gallons of Water

FOAM CELL

Foam Cell Not Required

COMPT, PUMPER, REAR

30.75" FF LAP Rear Compt

COMPT, PUMPER, LEFT SIDE

145" Lap Full Height Front & Rear Double OTW, FDLR

COMPT, PUMPER, RIGHT SIDE

145" Lap Low FDLR

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Side Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

Speedlays Not Required

GENERATOR


Generator Not Required

FOAM SYSTEM

Foam System Not Required

SAFETY

Side Roll and Frontal Impact Protection

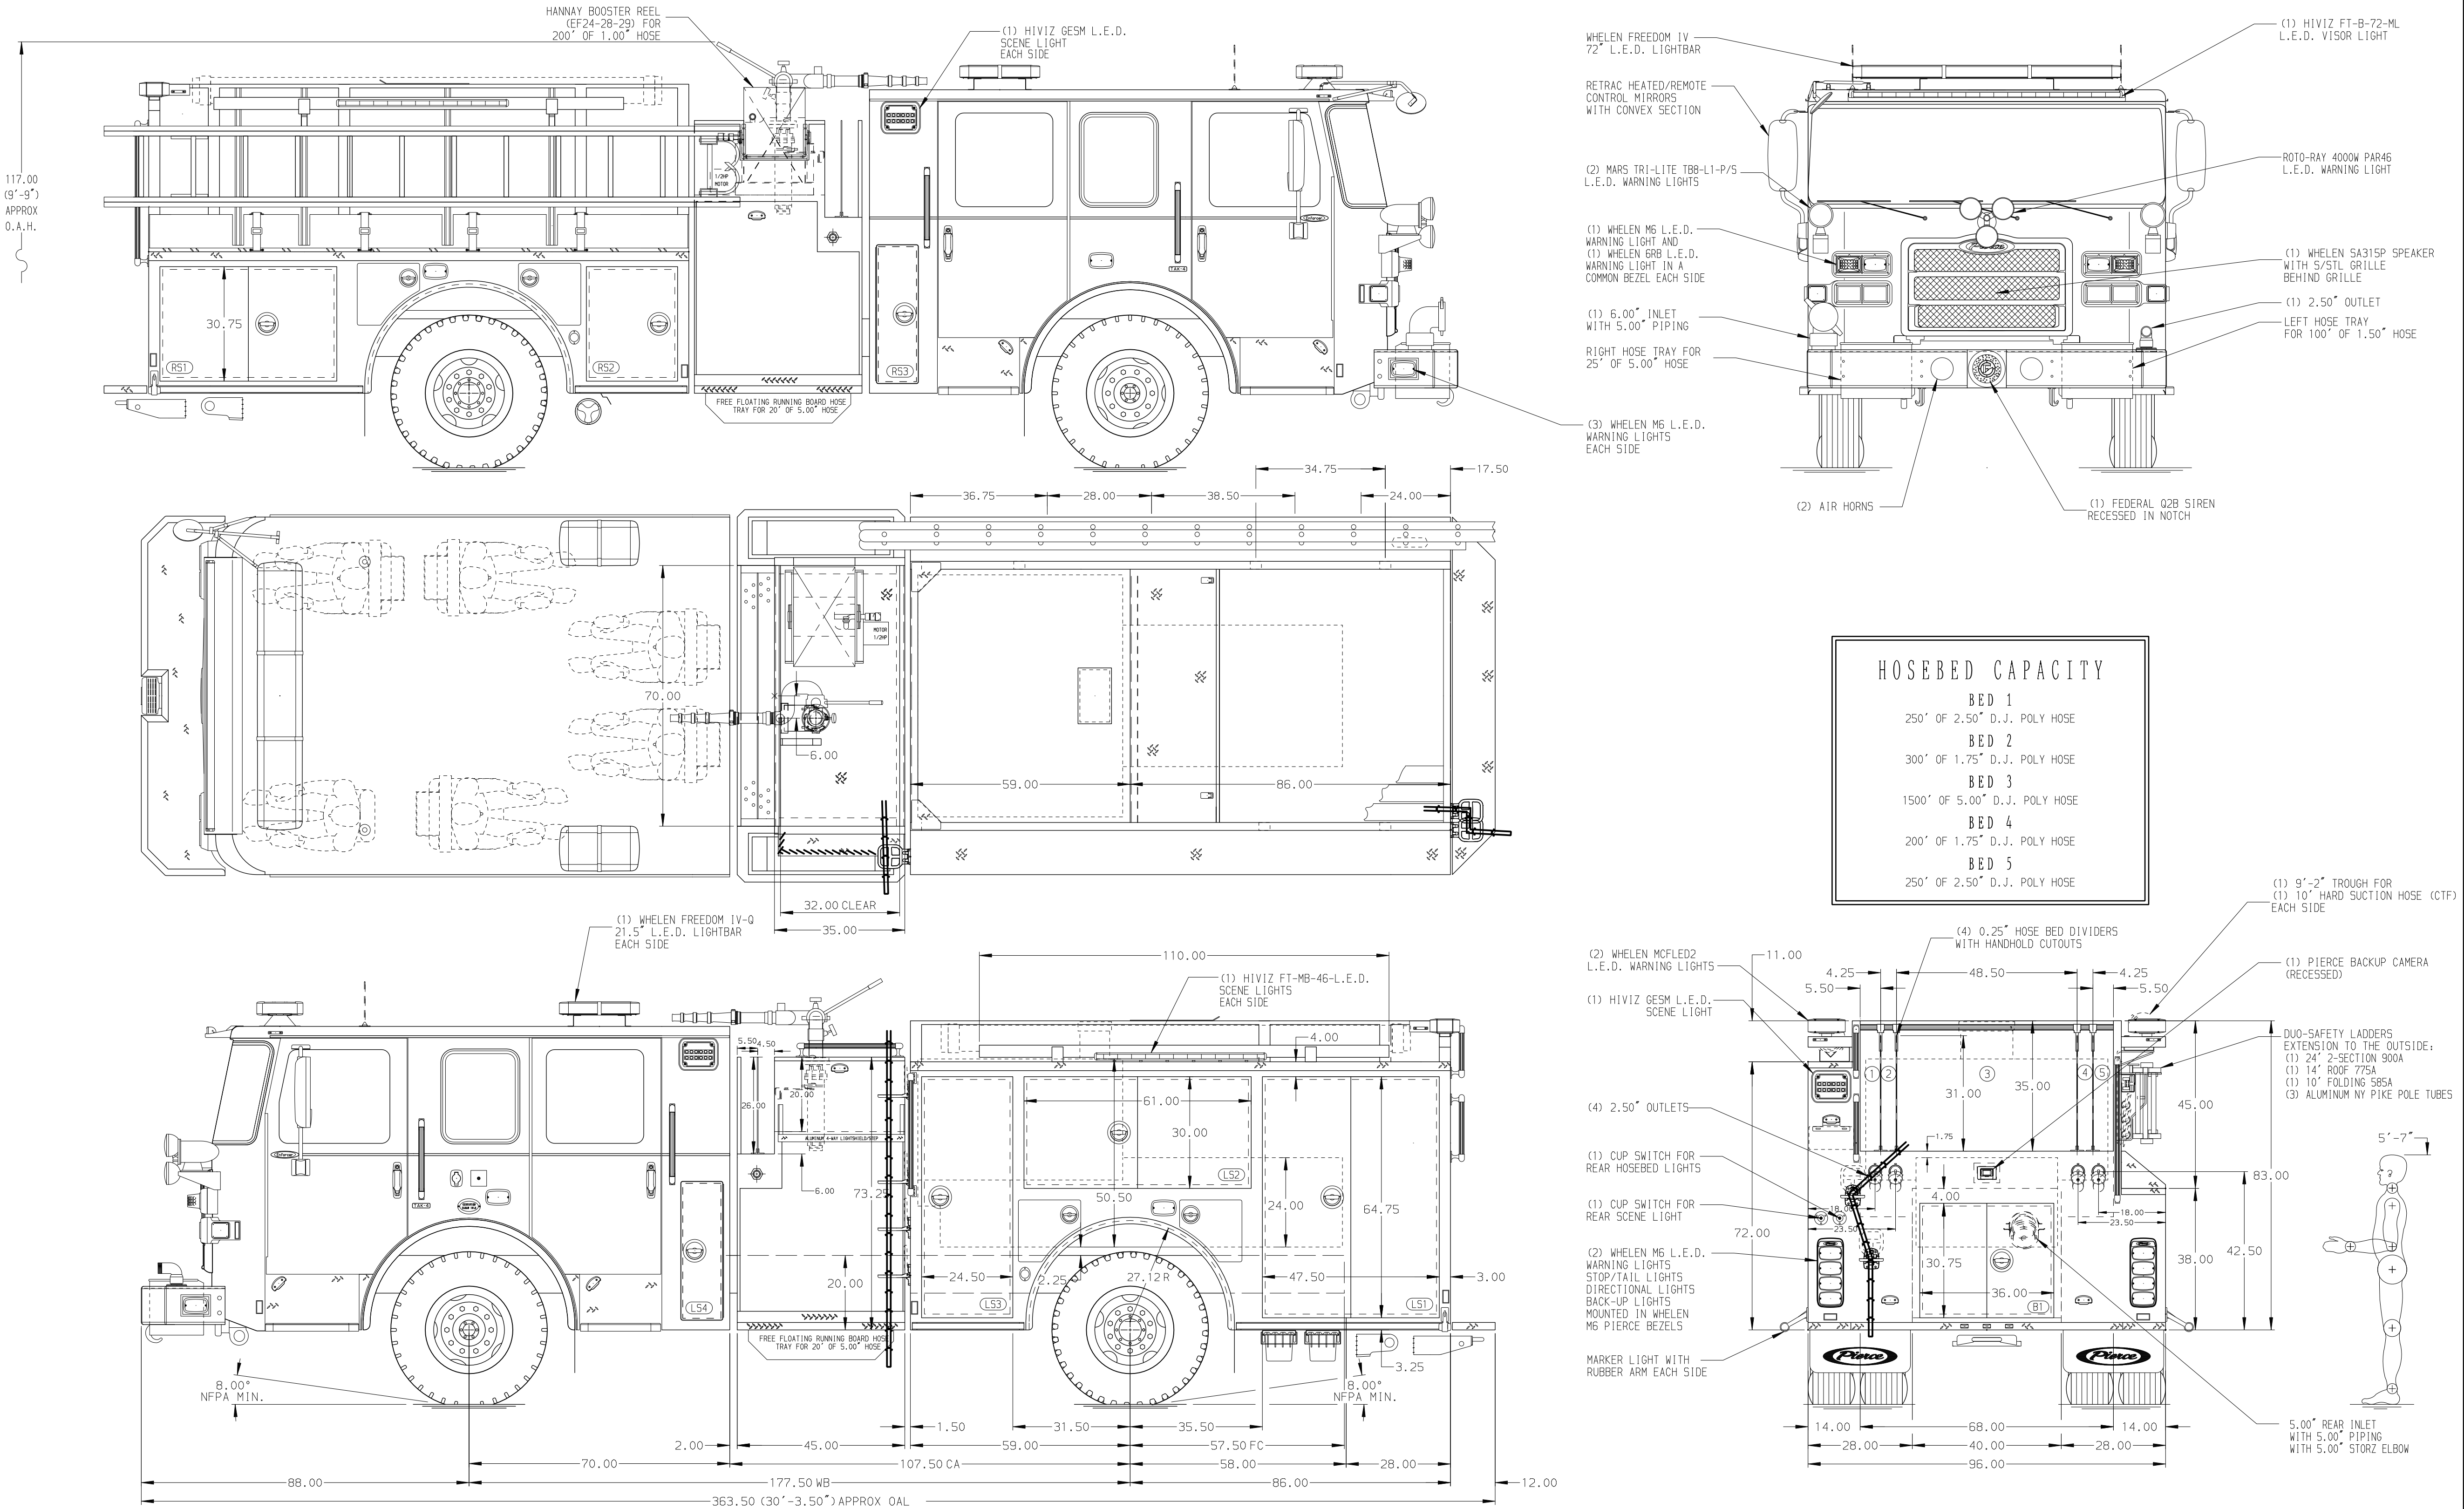

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING RECESSED IN THE DRIVER SIDE CAB
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER SEAT RISER
- ONE ADJUSTABLE SHELVES LOCATED PER ORDER
- ONE SLIDE-OUT TRAY LOCATED PER ORDER
- ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER ORDER
- CTECH CABINET LOCATED PER ORDER
- ONE SLIDE-OUT TOOLBOARD LOCATED PER ORDER
- FOUR RECEPTACLES LOCATED PER ORDER

REV	DATE	BY	CH	ENFORCER
1	18NOV24	JAM	JLL	MAKE
2	15OCT24	JAM	JLL	PIERCE
3	14OCT24	JAM	JLL	MODEL

Pierce MANUFACTURING INC.		JOB NO.	40555
TITLE		SCALE	1:24
FOR		DRAWN BY	JAM
DWG NO.		CHECKED BY	MMF
40555AD		SHEET SIZE	D
		SHEET NO.	1 OF 1