

New Franklin VFD

Job #40872

THIS REPORT CONTAINS PHOTOS OF:

- The truck after pump test.
- The pump panels close up.

GLICK

FIRE EQUIPMENT COMPANY, INC.




Pierce
FRANKLIN


MODULE
LINES
612


MODULE
LINES
612





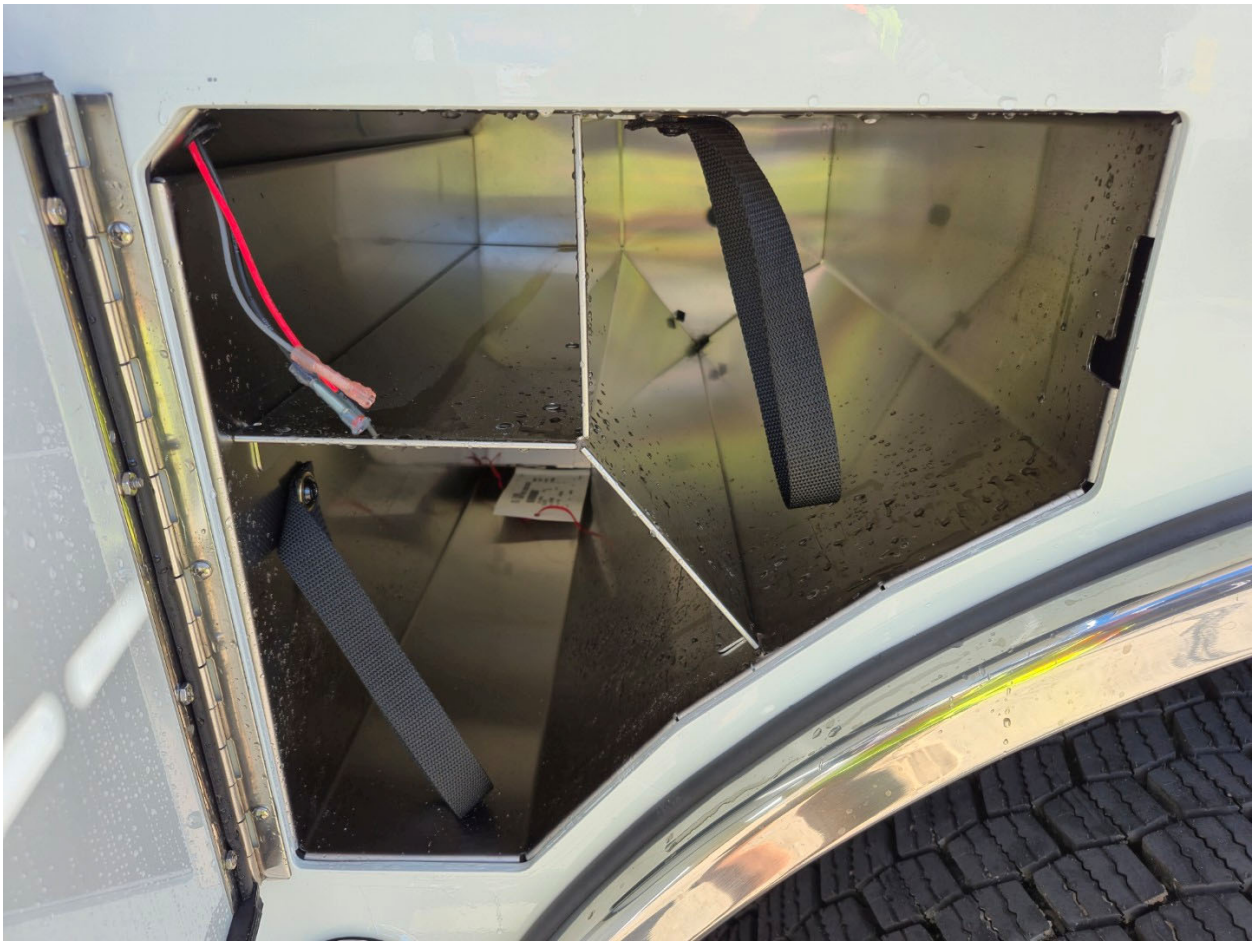









XDN2 GRIP
CAUTION




CAUTION
DIESEL EXHAUST FLUID (DEF) ONLY!
FILLING THE DEF TANK WITH OTHER LIQUIDS CAN RESULT IN PREMATURE FAILURE OF ENGINE AND EMISSIONS COMPONENTS.
DEF TANK CAPACITY: 5.0 US GALLONS
















MICHELIN


Pierce











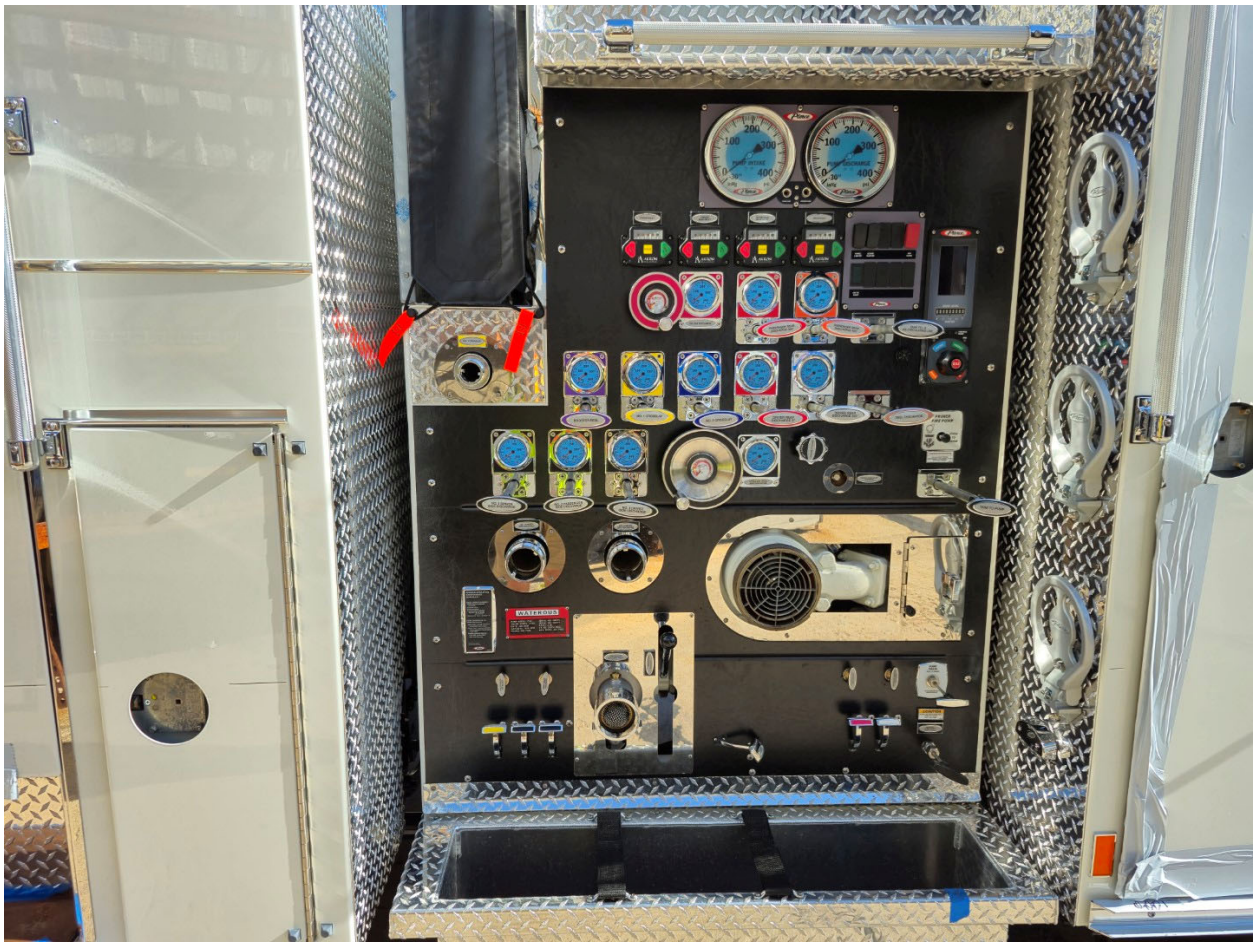


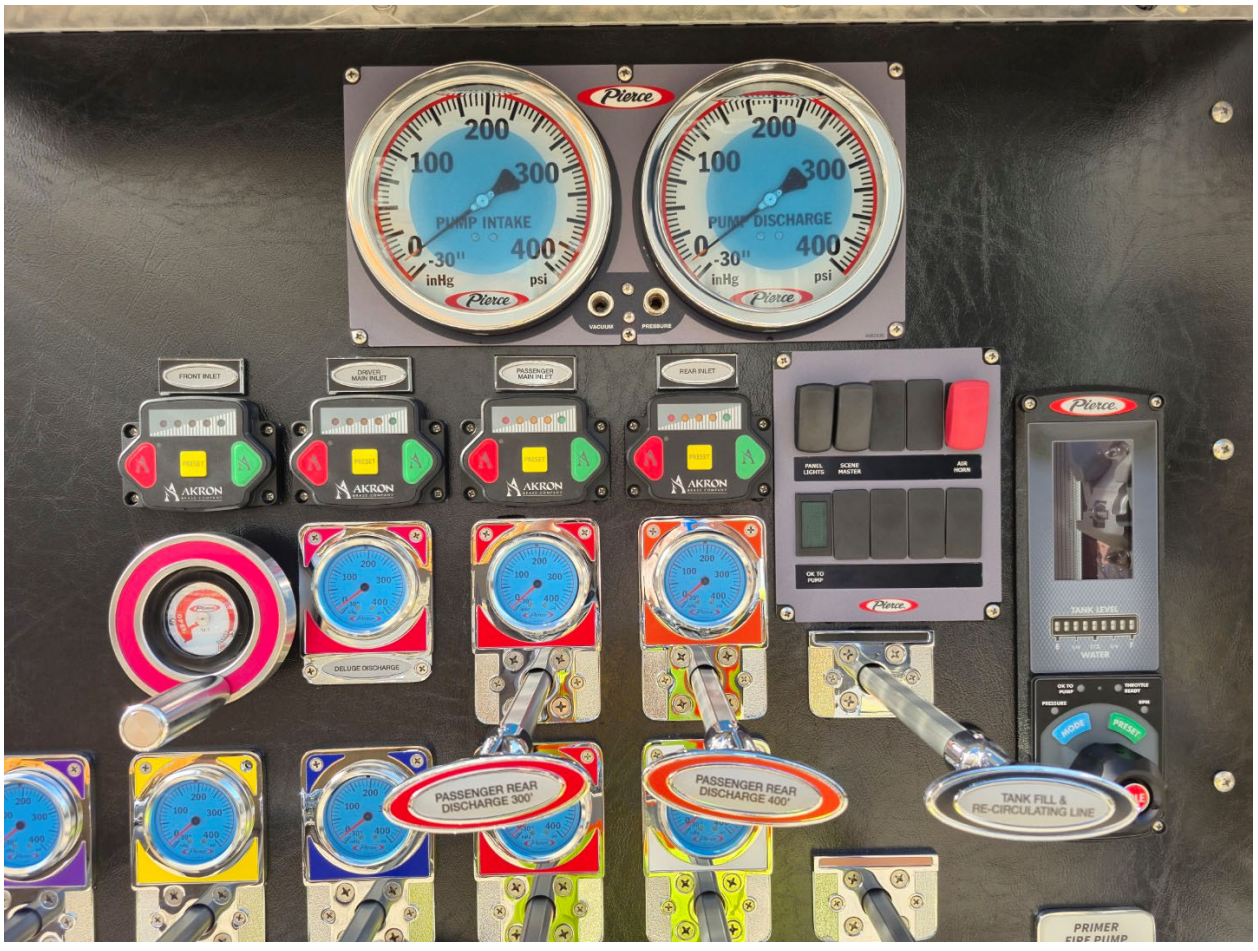







612
614

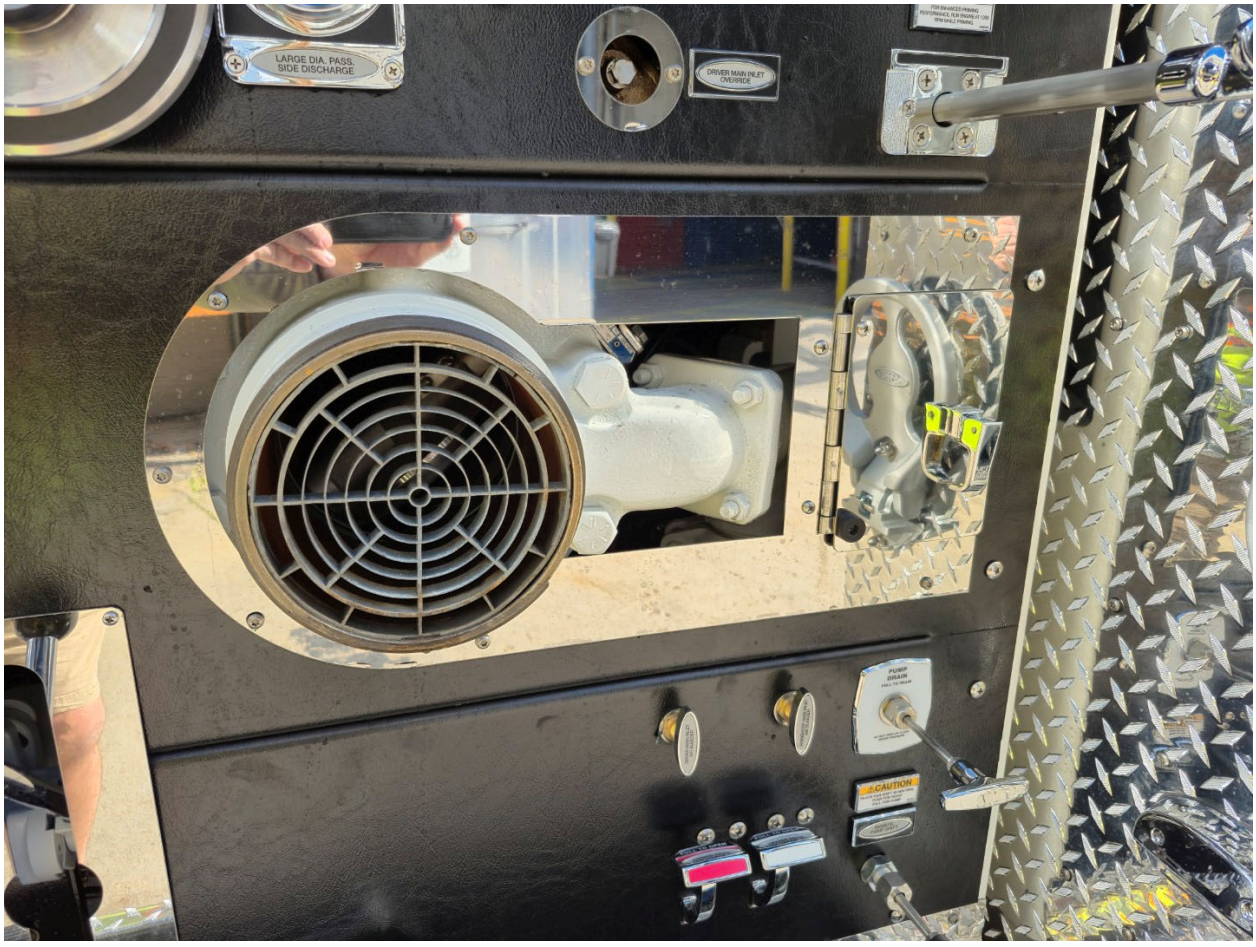



Pierce
PUMP INTAKE
PUMP DISCHARGE
inHg
psi
FRONT INLET
DRIVER MAIN INLET
PASSENGER MAIN INLET
REAR INLET
AKRON
DELUGE DISCHARGE
PASSENGER REAR DISCHARGE 300'
PASSENGER REAR DISCHARGE 400'
TANK FILL & RE-CIRCULATING LINE
PRIMER

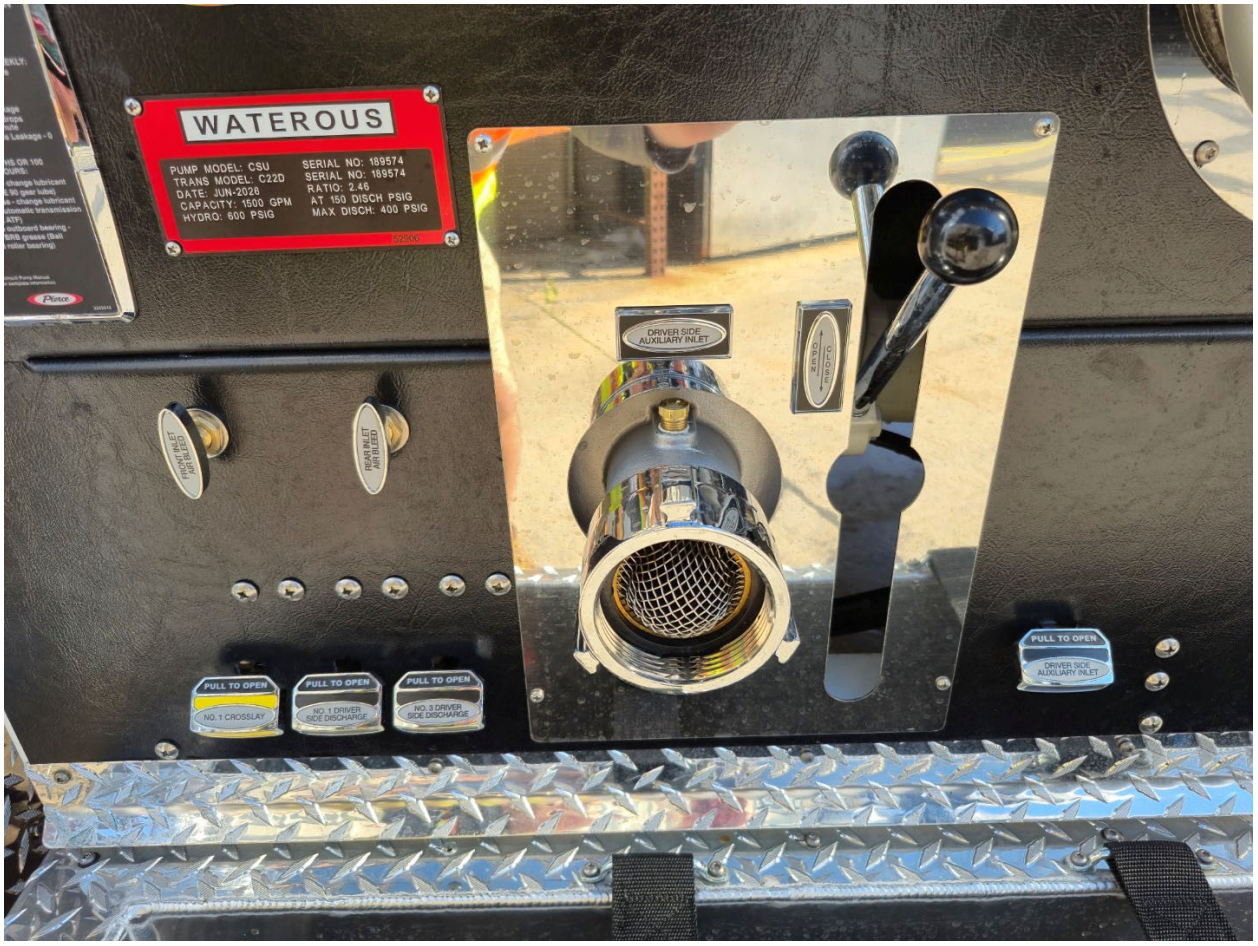

DRIVER REAR DISCHARGE 3"
DRIVER REAR DISCHARGE 300'
REEL DISCHARGE
PRIMER FIRE PUMP
TANK TO PUMP


DELUGE DISCHARGE
NO. 1 CROSSLAY
BOOSTER REEL
NO. 1 DRIVER SIDE DISCHARGE
NO. 2 PASSENGER SIDE DISCHARGE
NO. 3 DRIVER SIDE DISCHARGE

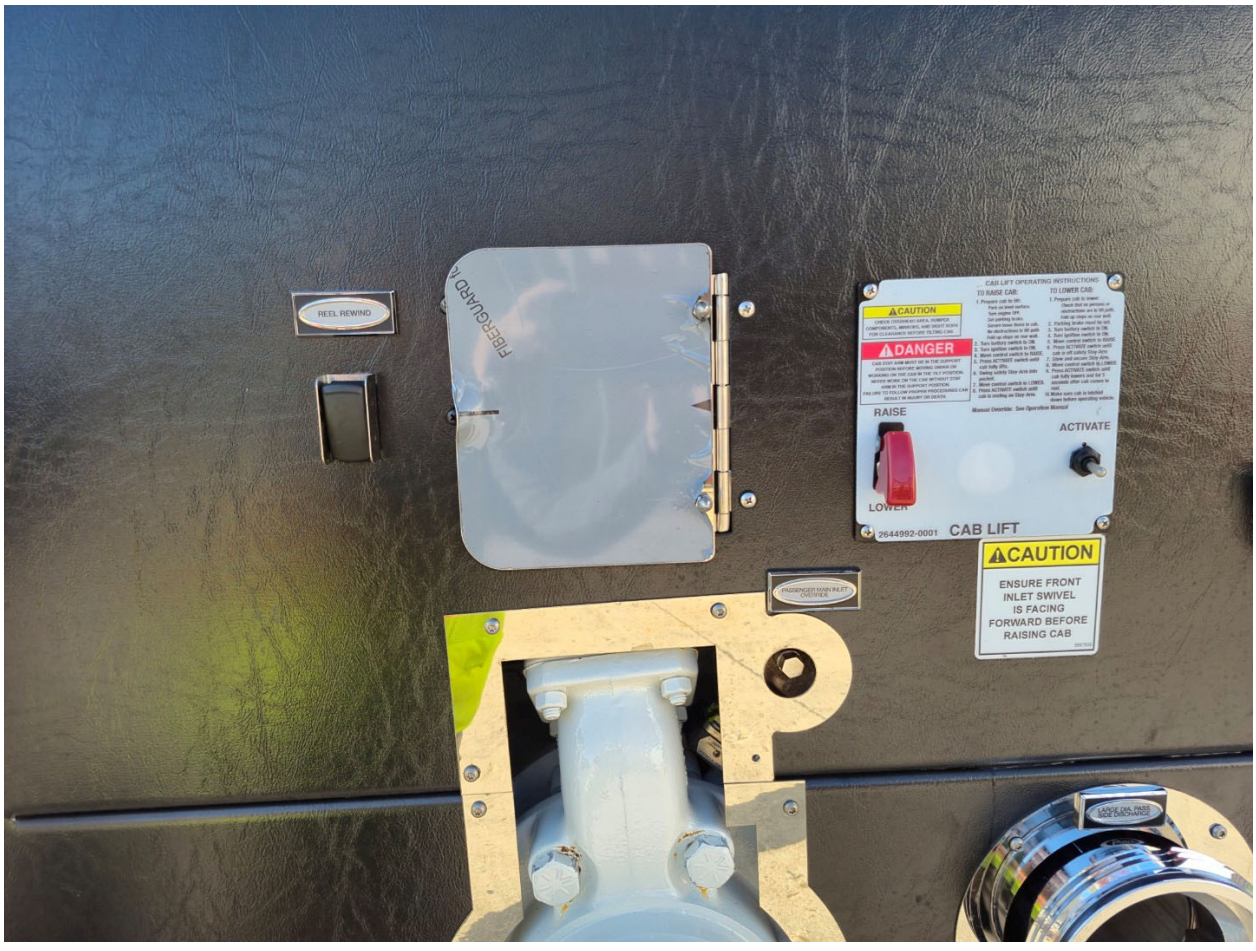

NO. 1 DRIVER SIDE DISCHARGE
NO. 3 DRIVER SIDE DISCHARGE
MINIMUM OPERATION MAINTENANCE SCHEDULE*
WATEROUS
PUMP MODEL: C5U
TRANS MODEL: C22D
DATE: JUN-2026
CAPACITY: 1500 GPM
HYDRO: 600 PSIG
SERIAL NO: 189574
SERIAL NO: 189574
RATIO: 2.46
AT 150 DISCH PSIG
MAX DISCH: 400 PSIG
DRIVER SIDE FLOODLIGHTS (RUE)
PUMP TO DRAIN
PUMP TO DRAIN

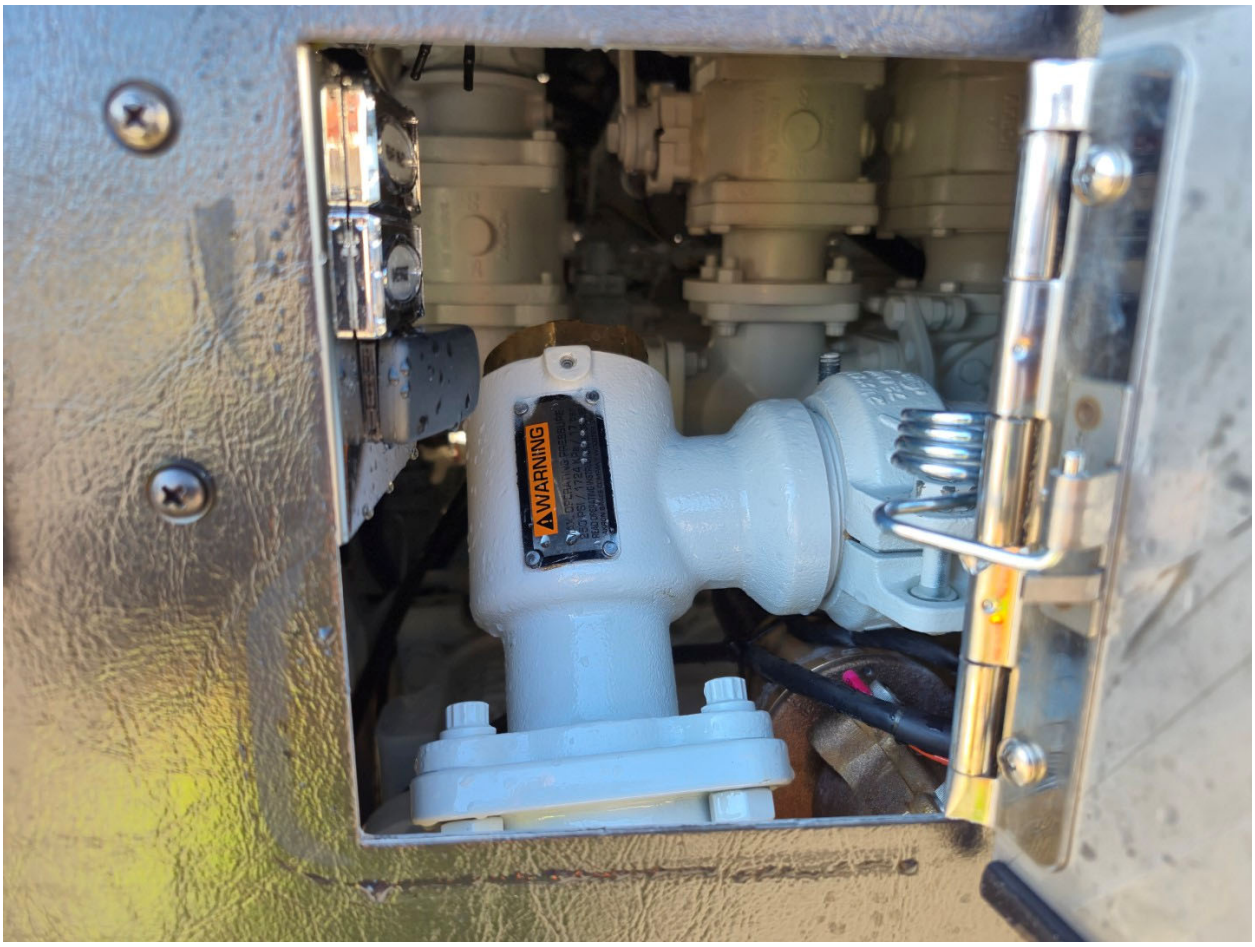

LARGE DIA. PASS. SIDE DISCHARGE
DRIVER MAIN INLET OVERRIDE
PUMP DRAIN
CAUTION


DRIVER MAIN INLET AIR BLEEDER
PASSENGER MAIN INLET AIR BLEEDER
PUMP DRAIN
PULL TO DRAIN
CAUTION
PLACE CAB SHIFT IN NEUTRAL
PUSH FOR ROAD
PULL FOR PUMP
MANUAL PUMP SHIFT
PULL TO OPEN
DRIVER REAR DISCHARGE 3"
PULL TO OPEN
DRIVER REAR DISCHARGE 800


WATEROUS
PUMP MODEL: CSU
TRANS MODEL: C22D
DATE: JUN-2028
CAPACITY: 1500 GPM
HYDRO: 600 PSIG
SERIAL NO: 189574
SERIAL NO: 189574
RATIO: 2.46
AT 150 DISCH PSIG
MAX DISCH: 400 PSIG
DRIVER SIDE AUXILIARY INLET
PULL TO OPEN
NO. 1 CROSSLAY
PULL TO OPEN
NO. 1 DRIVER SIDE DISCHARGE
PULL TO OPEN
NO. 3 DRIVER SIDE DISCHARGE
PULL TO OPEN
DRIVER SIDE AUXILIARY INLET

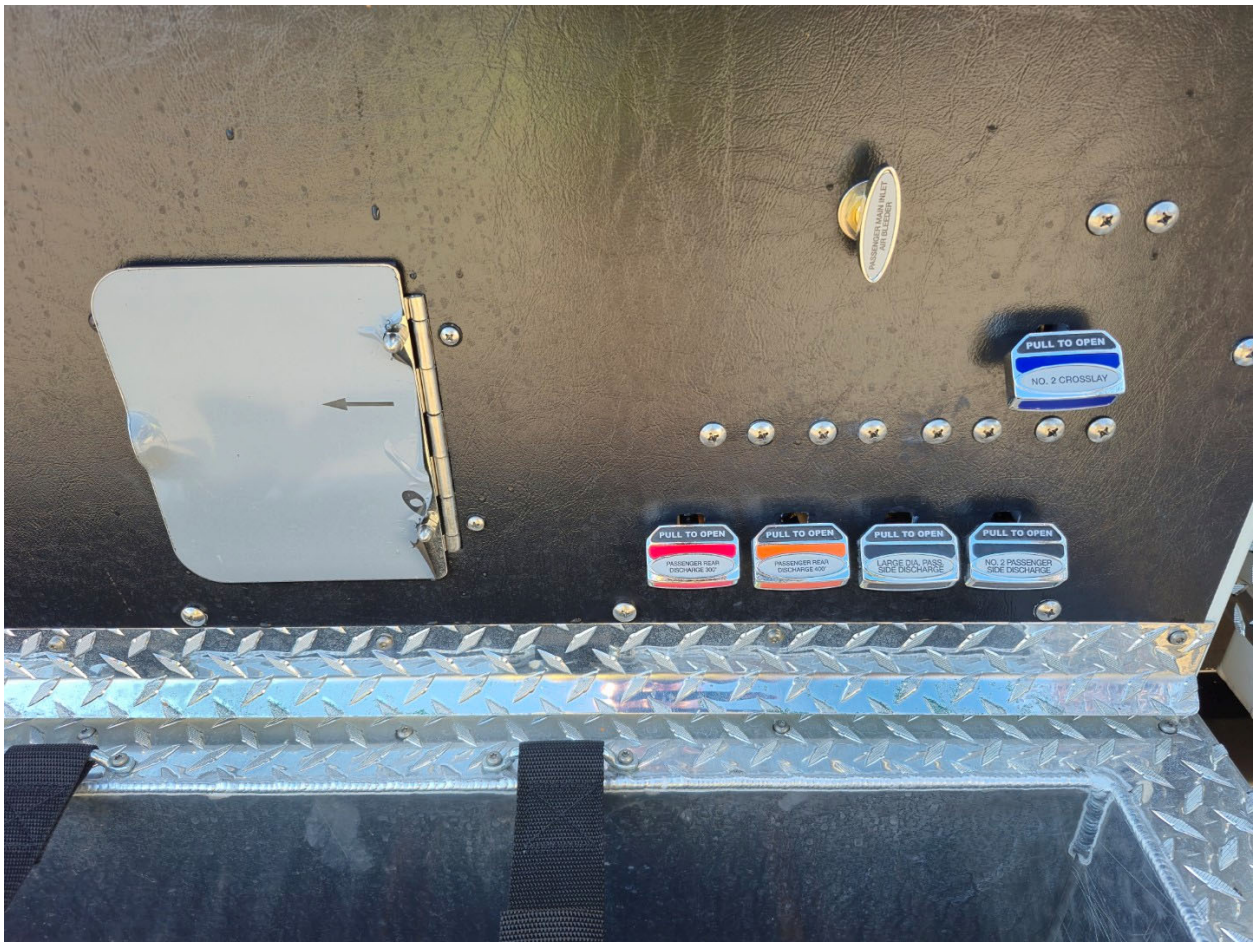


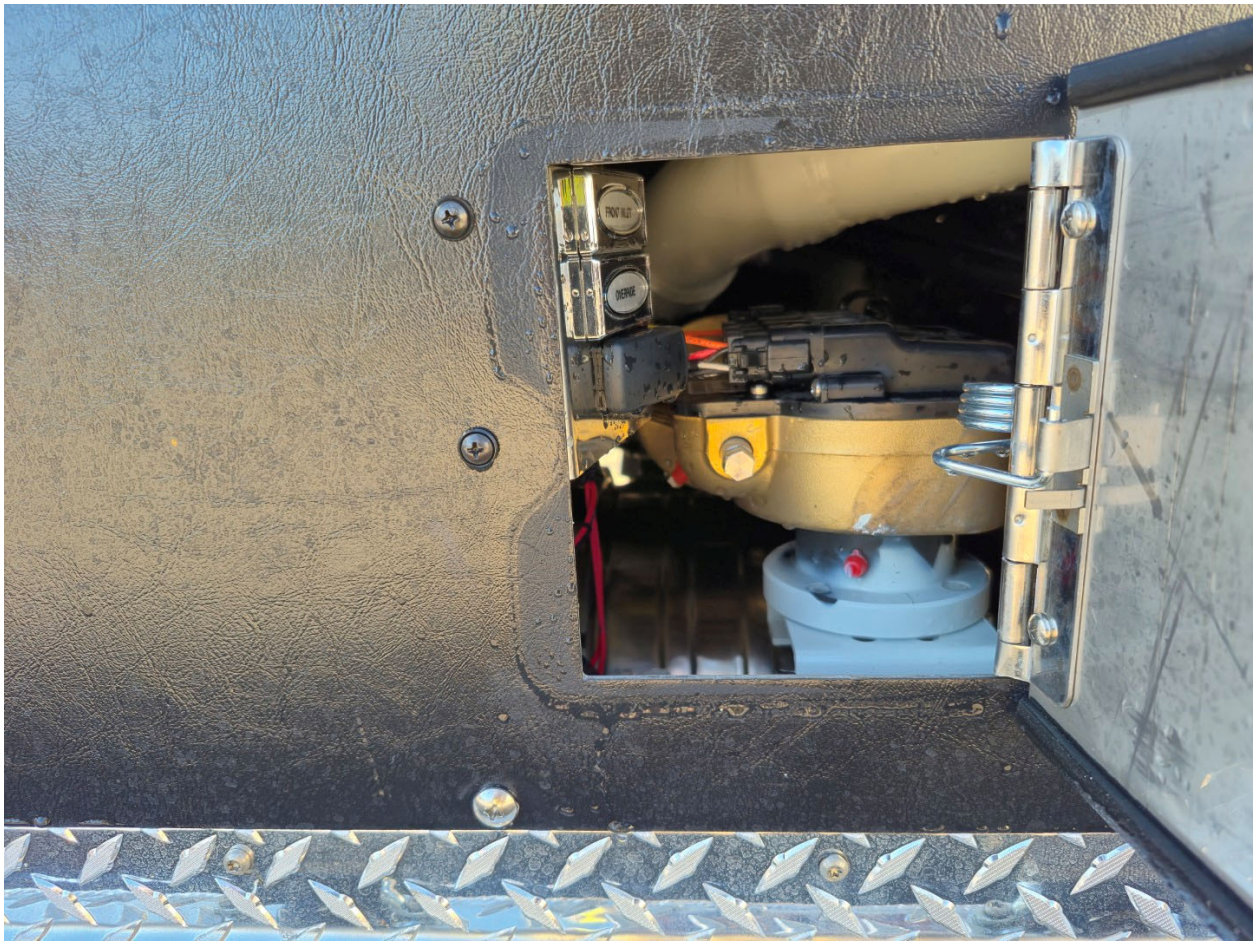

REEL REWIND
FIBERGUARD
CAB LIFT OPERATING INSTRUCTIONS
TO RAISE CAB:
TO LOWER CAB:
CAUTION
DANGER
RAISE
LOWER
ACTIVATE
2644992-0001
CAB LIFT
CAUTION
ENSURE FRONT INLET SWIVEL IS FACING FORWARD BEFORE RAISING CAB


WARNING


CAUTION
ENSURE FRONT
INLET SWIVEL
IS FACING
FORWARD BEFORE
RAISING CAB


IS FACING
FORWARD BEFORE
RAISING CAB
LARGE DIA. PASS.
SIDE DISCHARGE
NO. 2 PASSENGER
SIDE DISCHARGE


PULL TO OPEN
NO. 2 CROSSLAY
PULL TO OPEN
PASSENGER REAR
DISCHARGE 360°
PULL TO OPEN
PASSENGER REAR
DISCHARGE 45°
PULL TO OPEN
LARGE DIA. PASS.
SIDE DISCHARGE
PULL TO OPEN
NO. 2 PASSENGER
SIDE DISCHARGE








SPOTTER REQUIRED
WHEN BACKING


ENG BRK ON/OFF
ENG BRK LOW/HIGH
MIRROR HEAT
DIFF LOCK
TIRE CHAIN
ALLISON
MODE
R
N
D
Pierce












SRS







